



Model Number


V17-G-3M-PUR

Female cordset, M12, 8-pin, shielded, PUR cable

Features

- Immunity to vibration, with mechanical latching
- Shield applied to Pin 8
- Gold plated contacts
- Halogen-free

Dimensions

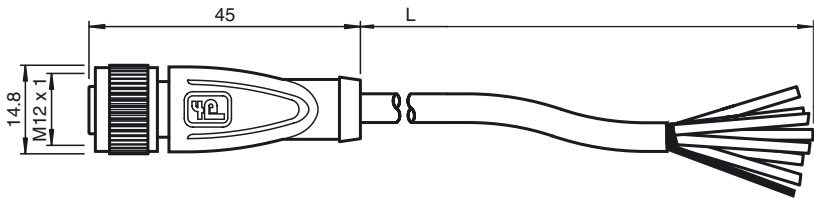

Technical data

General specifications

Number of pins	7 + 1 x screen
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U _B	max. 30 V DC
Operating current	I _B	max. 2 A
Volume resistance		< 10 mΩ , Contact resistance 53 Ω/km

Ambient conditions

Ambient temperature	cable, flexing: -5 to 70 °C (268 to 343 K), cable, fixed: -25 to 70 °C (248 to 343 K)
Pollution degree	3


Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67
Material	
Contacts	CuSn
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	CuZn, nickel-plated
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 6 mm
Bending radius	> 10 x cable diameter, moving
Color	grey
Number of cores	8
Core cross-section	0.25 mm ²
Conductor construction	14 x 0.15 mm Ø
Shield	grid covering 85 %
Length	L 3 m
Flammability	
Contact carrier	94 HB
Housing	94 V-2

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	Grip: UL 94

Electrical connection

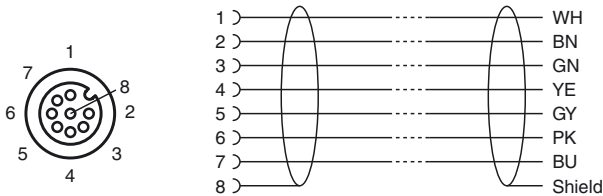

Release date: 2018-03-15 14:29 Date of issue: 2018-03-15 269405_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com