


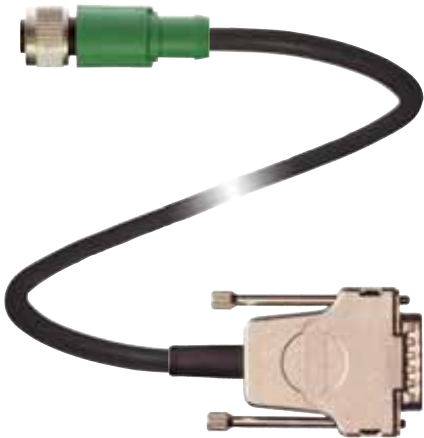

Model Number


V19-G-5M-PUR-ABG-SUBD15

Connection cable, M12 to SUB-D, PUR
cable 8-pin

Features

- M12 to Sub-D adapter


Dimensions

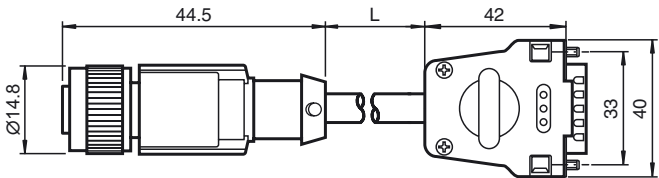

Technical data

General specifications			
Number of pins		8	
Electrical specifications			
Operating voltage	U _B	max. 30 V AC/DC	
Operating current	I _B	max. 2 A	
Ambient conditions			
Ambient temperature		Body: -25 ... 90 °C (-13 ... 194 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)	
Mechanical specifications			
Material			
Contacts		CuSn	
Contact surface		Au	
Body		TPU, green	
Cable		PUR	
Slotted nut		Diecast zinc	
Core insulation		PP	
Cable		extra-fine wire, flexible	
Sheath diameter		Ø 5.9 mm	
Bending radius		> 10 x cable diameter, moving > 8 x cable diameter, fixed	
Color		black	
Cores		8 x 0.25 mm ²	
Conductor construction		32 x 0.1 mm Ø	
Shield		grid covering 85 %	
Length	L	5 m	

Electrical connection

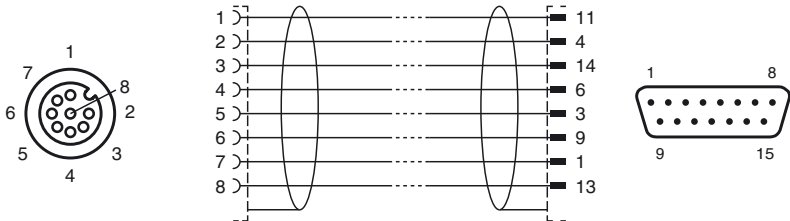

Release date: 2017-03-30 09:39 Date of issue: 2017-03-30 223360_eng.xml