# Female connector

## V19-G-BK2M-PUR-U

- Degree of protection IP67 / IP68 / IP69
- Free from substances that impair paint wetting
- Resistant to microbes and hydrolysis
- cURus approval
- UV resistant
- Halogen-free
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable black, UL approved, drag chain suitable, torsion resistant

## Dimensions

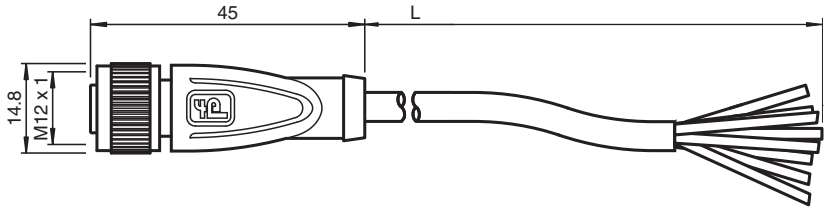


## Technical Data

| | | |
|---|---|---|
| **General specifications** | | |
| Connector 1 | | |
| Connection | | socket |
| Construction type | | M12 |
| Style | | straight |
| Locking | | screw connection |
| Number of pins | | 8 |
| Coding | | A-coded |
| Connector 2 | | |
| Connection | | cable end |
| UL File Number | | E231213 |
| **Electrical specifications** | | |
| Operating voltage | $U_B$ | max. 30 V AC/DC |
| Operating current | $I_B$ | max. 2 A |
| **Conformity** | | |
| Degree of protection | | EN 60529 |

Release date: 2020-09-17 Date of issue: 2020-09-17 Filename: 456503_eng.pdf



ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com

## Technical Data

| | | |
|---|---|---|
| Plug connection | | connector M12 x 1 : IEC 61076-2-101 |
| Flammability | | UL 1581; DIN EN 60332-2-2 |
| Halogen-free | | IEC 60754-1 |
| **Approvals and certificates** | | |
| UL approval | | AWM STYLE 20549 AWM I/II A/B 80°C 300V FT2 (cable) |
| **Ambient conditions** | | |
| Ambient temperature | | |
| Plug connector | | -40 ... 90 °C (-40 ... 194 °F) |
| Cable, fixed | | -40 ... 80 °C (-40 ... 176 °F) |
| Cable, flexing | | -20 ... 80 °C (-4 ... 176 °F) |
| Pollution degree | | 3 |
| **Mechanical specifications** | | |
| Plug connector | | |
| Tightening torque | | 0.6 Nm |
| Loosening protection | | available |
| Tool installation | | straight knurling |
| Mating cycles | | min. 100 |
| Degree of protection | | IP67 / IP68 / IP69 |
| Cable | | according to IEC/EN 60228 (DIN VDE 0295) class 5 |
| Sheath diameter | | 6 mm |
| Bending radius | | > 10 x cable diameter, moving<br>> 8 x cable diameter, fixed |
| Sheath stripping force | | max. 80 N / 500 mm |
| Sheath color | | black (similar to RAL 9005) |
| Number of cores | | 8 |
| Core cross-section | | 0.25 $mm^2$ |
| Cores color | | Core 1: white<br>Core 2: brown<br>Core 3: green<br>Core 4: yellow<br>Core 5: grey<br>Core 6: pink<br>Core 7: blue<br>Core 8: red |
| Core construction | | 14 x 0.15 mm Ø |
| Length | L | 2 m |
| Cable code | | Li 9Y 11Y 8 x 0,25 |
| **Material** | | |
| LABS free | | yes |
| Halogen-free | | yes |
| Plug connector | | |
| Knurled screw connection | | Zinc die-casting, nickel-plated |
| Body | | TPU, black |
| Contact surface | | Au |
| Flammability | | V-2 |
| Cable | | |
| Sheathing | | PUR based on polyether |
| Core insulation | | PP |
| UV resistance | | yes |
| Chemical resistance | | good |
| Oil resistance | | yes |
| Cooling lubricant resistance | | yes |
| Microbial resistance | | yes |
| Hydrolysis resistance | | yes |
| Flammability | | FT2 |

Release date: 2020-09-17 Date of issue: 2020-09-17 Filename: 456503_eng.pdf

## Connection Assignment



Release date: 2020-09-17 Date of issue: 2020-09-17 Filename: 456503_eng.pdf