



Model Number


V19-G-BK35M-PUR-U/ABG

Female cordset, M12, 8-pin, shielded, PUR cable

Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Flame resistant cable
- Halogen-free
- Shield attached to coupling nut


Dimensions

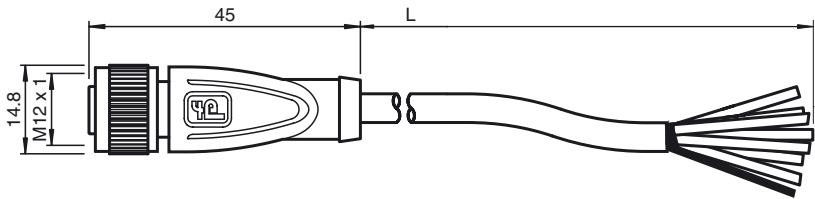

Technical data

General specifications		
Number of pins		8
UL File Number		E231213
Electrical specifications		
Operating voltage	U _B	max. 30 V DC
Operating current	I _B	max. 2 A
Volume resistance		< 5 mΩ
Ambient conditions		
Ambient temperature		-40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F)
Pollution degree		3
Mechanical specifications		
Contact elements		spring-loaded contact socket
Pin diameter		0,8 mm
Degree of protection		IP67
Material		
Contacts		CuSn / Au
Contact surface		Au
Body		TPU, black
Cable		PUR
Slotted nut		Diecast zinc
Core insulation		PP
Cable		
Cable		fine-strand, flexible
Sheath diameter		Ø 6 mm
Bending radius		> 10 x cable diameter, moving
Color		black
Number of cores		8
Core cross-section		0.25 mm ²
Conductor construction		14 x 0.15 mm Ø
Shield		grid covering 85 %
Length	L	35 m
Flammability		
Contact carrier		94 HB
Housing		94 V-2
Approvals and certificates		
UL approval		cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)

Electrical connection

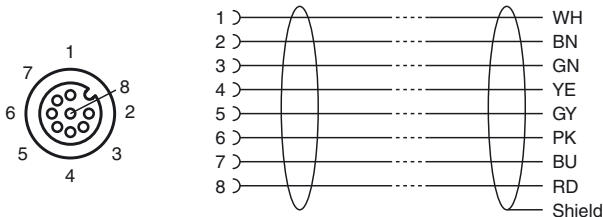

Release date: 2017-02-10 15:41 Date of issue: 2017-02-10 240004-100010_eng.xml