



Model Number


V1S-W-10M-PUR-ABG0

Cable connector, M12, 4-pin, shielded, PUR cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Degree of protection IP67 / IP68 / IP69K
- Gold plated contacts
- Halogen-free


Dimensions

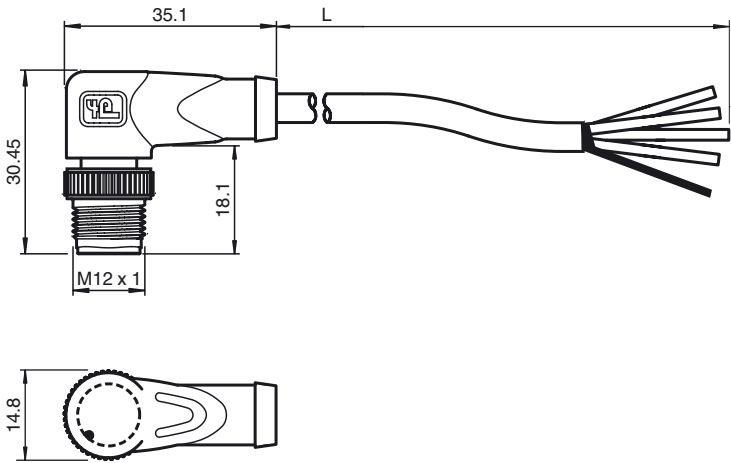

Technical data

General specifications			
Number of pins		4 + shield	
Connection 1		Male connector	
Construction type 1		right angle	
Threading 1		M12	
Connection 2		cable end	
Electrical specifications			
Operating voltage		U _B	max. 250 V AC/DC
Operating current		I _B	max. 4 A
Volume resistance		< 5 mΩ	
Ambient conditions			
Ambient temperature		Body: -40 ... 90 °C (-40 ... 194 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F) cable, fixed: -25 ... 80 °C (-13 ... 176 °F)	
Pollution degree		3	
Mechanical specifications			
Contact elements		contact pin	
Pin diameter		1 mm	
Degree of protection		IP67	
Material			
Contacts		CuSn / Au	
Contact surface		Au	
Body		TPU, black	
Cable		PUR	
Sleeve connector		Diecast zinc	
Core insulation		PP	
Cable		fine-strand, flexible	
Sheath diameter		Ø 4.8 mm	
Bending radius		> 10 x cable diameter, moving 5 x cable diameter, single bend	
Color		grey	
Number of cores		4	
Core cross-section		0.34 mm ²	
Conductor construction		19 x 0.15 mm Ø	
Shield		grid covering 85 %	
Length		L	10 m
Flammability			
Contact carrier		HB	
Housing		V-2	
Compliance with standards and directives			
Standard conformity			
Degree of protection		EN 60529:2000	
Standards		IEC 61076-2-101:2008	

Electrical connection

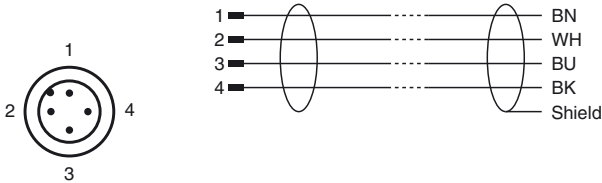

Release date: 2018-03-26 15:36 Date of issue: 2018-03-26 266117_eng.xml



Flammability

Grip: UL 94