



Model Number

V3-GM-5M-PVC

Female cordset single-ended, M8, 3-pin, PVC cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts

Accessories

MH V3-SCREWDRIVER
torque screwdriver (0.4 Nm)


MH V3-BIT M8
plug-in cap for M8

MH V3-Holder
Modular universal holder for M8 connectors

V1/V3-LABEL
Label plate

V1/V3-LABELHOLDER
Label holder


Dimensions

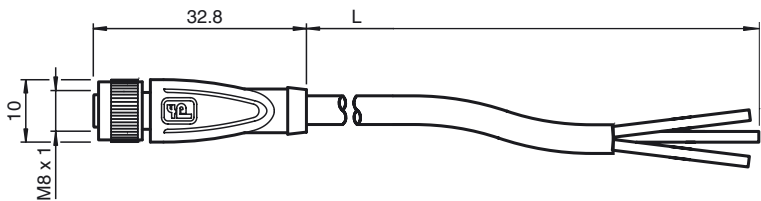

Technical data

General specifications		
Number of pins		3
Connection 1		socket
Construction type 1		straight
Threading 1		M8
Connection 2		cable end
Electrical specifications		
Operating voltage	U _B	max. 48 V AC / 60 V DC
Operating current	I _B	max. 3 A
Volume resistance		< 5 mΩ
Ambient conditions		
Ambient temperature		Body: -40 ... 90 °C (-40 ... 194 °F) cable, fixed: -25 ... 70 °C (-13 ... 158 °F) cable, flexing: -5 ... 70 °C (23 ... 158 °F)
Pollution degree		3
Mechanical specifications		
Contact elements		spring-loaded contact socket
Pin diameter		1 mm
Degree of protection		IP67
Material		
Contacts		CuSn / Au
Contact surface		Au
Body		TPU, black
Cable		PVC
Slotted nut		Diecast zinc
Core insulation		PVC
Cable		fine-strand, flexible
Sheath diameter		Ø 4.3 mm
Bending radius		> 15 x cable diameter, moving > 10 x cable diameter, fixed
Color		grey
Cores		3 x 0.25 mm ²
Conductor construction		14 x 0.15 mm Ø
Length	L	5 m
Flammability		
Contact carrier		HB
Housing		V-2
Compliance with standards and directives		
Standard conformity		
Degree of protection		EN 60529:2000
Flammability		Grip: UL 94
Specification		connector M8 x 1 : IEC 61076-2-104

Electrical connection

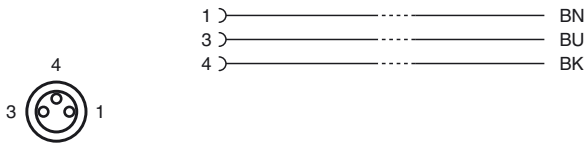

Release date: 2019-07-15 14:39 Date of issue: 2019-07-15 109023_eng.xml