


Connection cable

V94-G-YE0,6M-STOOW-V94-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 4-pin

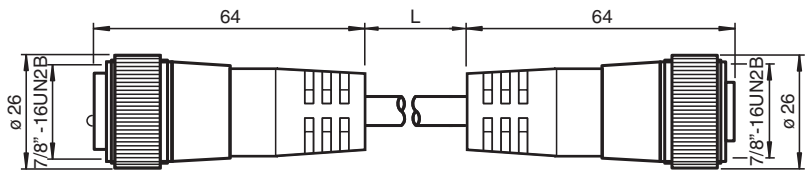

Technical Data

General specifications			
Number of pins		4	
Connection 1		socket	
Construction type 1		straight	
Threading 1		7/8 inch	
Connection 2		Male connector	
Construction type 2		straight	
Threading 2		7/8 inch	
Electrical specifications			
Operating voltage	U _B	max. 600 V	
Operating current	I _B	13 A	
Volume resistance		< 5 mΩ	
Approvals and certificates			
UL approval		cULus Listed, General Purpose	
Ambient conditions			
Ambient temperature		-40 ... 105 °C (-40 ... 221 °F)	
Mechanical specifications			
Degree of protection		IP67	
Material			
Contacts		Cu alloy gold plated	
Body		PVC, yellow	
Cable		PVC	
Slotted nut		nickel-plated brass	
Core insulation		PVC	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Cable		fine-strand, flexible
Sheath diameter		Ø 9.9 mm
Bending radius		10 x cable diameter
Color		yellow
Cores		4 x 1.5 mm ² (16 AWG)
Length	L	0.6 m
Note		STOOW UL Standard

Connection



Release date: 2020-06-25 Date of issue: 2020-06-25 Filename: 70119783_eng.pdf