


Connection cable

V95-G-YE5M-STOOW-V95-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 5-pin

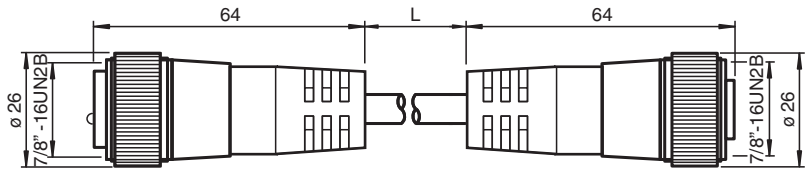

Technical Data

General specifications			
Number of pins			5
Connection 1			socket
Construction type 1			straight
Threading 1			7/8 inch
Connection 2			Male connector
Construction type 2			straight
Threading 2			7/8 inch
Electrical specifications			
Operating voltage	U _B		max. 600 V
Operating current	I _B		13 A
Volume resistance			< 5 mΩ
Approvals and certificates			
UL approval			cULus Listed, General Purpose
Ambient conditions			
Ambient temperature			-40 ... 105 °C (-40 ... 221 °F)
Mechanical specifications			
Degree of protection			IP67
Material			
Contacts			Cu alloy gold plated
Body			PVC, yellow
Cable			PVC
Slotted nut			nickel-plated brass
Core insulation			PVC

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Cable		fine-strand, flexible
Sheath diameter		Ø 9.9 mm
Bending radius		10 x cable diameter
Color		yellow
Cores		5 x 1.5 mm ² (16 AWG)
Length	L	5 m
Note		STOOW UL Standard

Connection



Release date: 2020-06-25 Date of issue: 2020-06-25 Filename: 70119796_eng.pdf