



Model Number


V95-G-YE6M-STOOW

Female cordset, 7/8", 5-pin, STOOW cable

Features

- Thread 7/8 inch


Dimensions

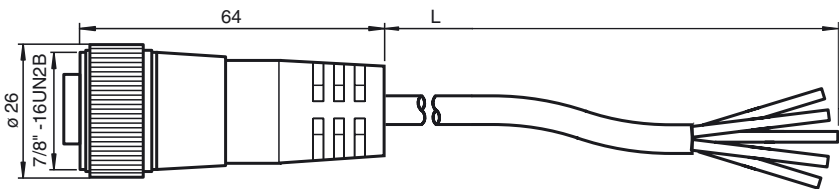

Technical data

|                            |                |                                  |
|----------------------------|----------------|----------------------------------|
| General specifications     |                |                                  |
| Number of pins             |                | 5                                |
| Connection 1               |                | socket                           |
| Construction type 1        |                | straight                         |
| Threading 1                |                | 7/8 inch                         |
| Connection 2               |                | cable end                        |
| Electrical specifications  |                |                                  |
| Operating voltage          | U <sub>B</sub> | max. 600 V                       |
| Operating current          | I <sub>B</sub> | 8 A                              |
| Volume resistance          |                | < 5 mΩ                           |
| Ambient conditions         |                |                                  |
| Ambient temperature        |                | -40 ... 105 °C (-40 ... 221 °F)  |
| Mechanical specifications  |                |                                  |
| Degree of protection       |                | IP67                             |
| Material                   |                |                                  |
| Contacts                   |                | Cu alloy gold plated             |
| Body                       |                | PVC, yellow                      |
| Cable                      |                | PVC                              |
| Slotted nut                |                | nickel-plated brass              |
| Core insulation            |                | PVC                              |
| Cable                      |                |                                  |
| Sheath diameter            |                | Ø 12.9 mm                        |
| Bending radius             |                | 10 x cable diameter              |
| Color                      |                | yellow                           |
| Cores                      |                | 5 x 1.5 mm <sup>2</sup> (16 AWG) |
| Length                     | L              | 6 m                              |
| Note                       |                | STOOW UL Standard                |
| Approvals and certificates |                |                                  |
| UL approval                |                | cULus Listed, General Purpose    |

Electrical connection

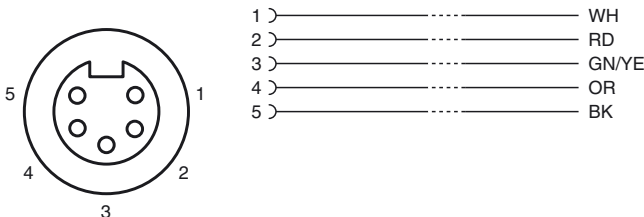

Release date: 2018-04-10 11:06 Date of issue: 2018-04-10 912593\_eng.xml