


RoHS compliant

FEATURES

- 1. Low capacitance and on-resistance with 80V load voltage
Output capacitance (Cout): 4.5pF (typ.)
ON resistance (Ron): 10.5Ω (typ.)
- 2. Reduced package size
The bottom dimension has been reduced by 60% and mounting space by 40% compared to conventional SOP4-pin type.
- 3. Mounting space has been reduced and output signals have been improved by using new flat lead terminals.



- 4. High speed switching
Turn on time: 0.05ms (typ.)
Turn off time: 0.05ms (typ.)

TYPICAL APPLICATIONS

- 1. Measuring and testing equipment
IC tester, Liquid crystal driver tester, Semiconductor performance tester, Bare board tester, In-circuit tester, function tester, etc.
- 2. Telecommunication and broadcasting equipment
- 3. Medical equipment
- 4. Multi-point recorder
Warping, Thermo couple, etc.

TYPES

	Output rating*1		Package	Tape and reel packing style*2		Packing quantity in tape and reel
	Load voltage	Load current		Picked from the 1/4-pin side	Picked from the 2/3-pin side	
AC/DC dual use	80 V	0.12 A	SSOP	AQY225R2VY	AQY225R2VW	3,500 pcs.

Notes: *1 Indicate the peak AC and DC values.
*2 Tape and reel is the standard packing style for SSOP.
For space reasons, the three initial letters of the part number “AQY” the package (SSOP) indicator “V” and the packing style indicator “Y” or “W” are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQY225R2V	Remarks
Input	LED forward current	IF	50mA	
	LED reverse voltage	VR	5V	
	Peak forward current	IFP	1A	f=100 Hz, Duty factor=0.1%
	Power dissipation	Pin	75mW	
Output	Load voltage (peak AC)	VL	80V	
	Continuous load current	IL	0.12A	Peak AC, DC
	Peak load current	Ipeak	0.3A	A connection: 100 ms (1 shot), VL= DC
	Power dissipation	Pout	250mW	
Total power dissipation		PT	300mW	
I/O isolation voltage		Viso	1,500V AC	
Temperature limits	Operating	Topr	−40°C to +85°C −40°F to +185°F	Non-condensing at low temperatures
	Storage	Tstg	−40°C to +100°C −40°F to +212°F	

RF SSOP 1 Form A C×R (AQY225R2V)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQY225R2V	Condition	
Input	LED operate current	Typical	I _{Fon}	0.5 mA	I _L = 80 mA	
		Maximum		3.0 mA		
	LED turn off current	Minimum	I _{Foff}	0.1 mA	I _L = 80 mA	
		Typical		0.45 mA		
	LED dropout voltage	Typical	V _F	1.32 V (1.14 V at I _F = 5 mA)	I _F = 50 mA	
		Maximum		1.5 V		
Output	On resistance	Typical	R _{on}	10.5Ω	I _F = 5 mA	
		Maximum		15Ω	I _L = 80 mA	
	Output capacitance	Typical	C _{out}	4.5 pF	I _F = 0 mA	
		Maximum		6 pF	V _B = 0 V f = 1 MHz	
	Off state leakage current	Typical	I _{Leak}	0.01 nA	I _F = 0 mA	
		Maximum		10 nA	V _L = Max.	
Transfer characteristics	Turn on time*	Typical	T _{on}	0.05 ms	I _F = 5 mA	
		Maximum		0.5 ms	V _L = 10 V R _L = 125Ω	
	Turn off time*	Typical	T _{off}	0.05 ms	I _F = 5 mA	
		Maximum		0.2 ms	V _L = 10 V R _L = 125Ω	
	I/O capacitance	Typical	C _{iso}	0.8 pF	f = 1 MHz	
		Maximum		1.5 pF	V _B = 0 V	
	Initial I/O isolation resistance		Minimum	R _{iso}	1,000MΩ	500V DC

*Turn on/Turn off time

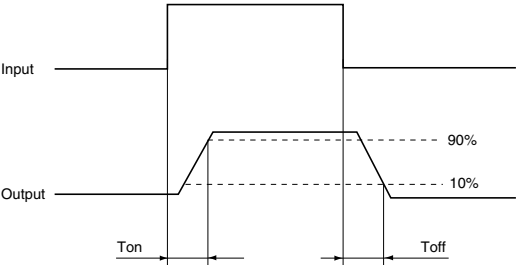

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.


Item	Symbol	Recommended value	Unit
Input LED current	I _F	5	mA

- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.


■ These products are not designed for automotive use.
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.
For more information.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

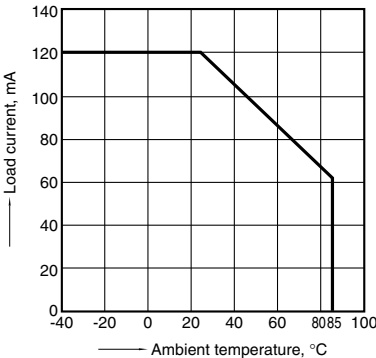

2. On resistance vs. ambient temperature characteristics
Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: 10V (DC);
Load current: 80mA (DC)

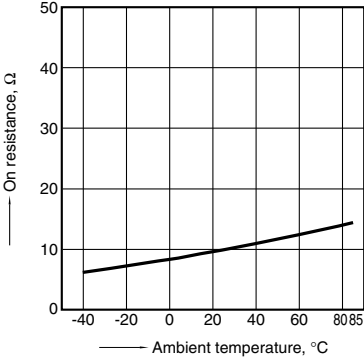


3. Turn on time vs. ambient temperature characteristics
LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

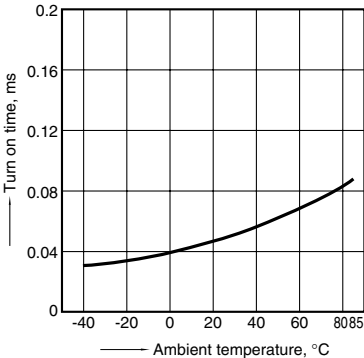

RF SSOP 1 Form A C×R (AQY225R2V)


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

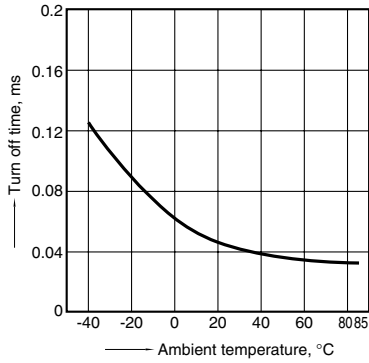


5. LED operate current vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

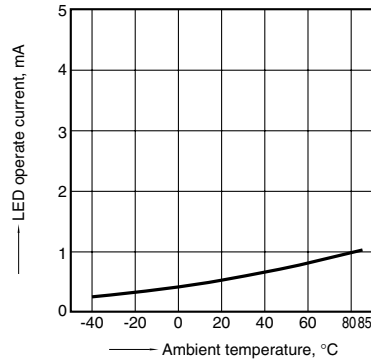


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

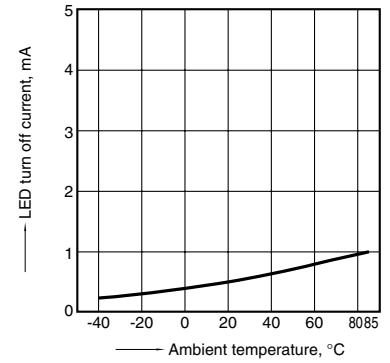


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

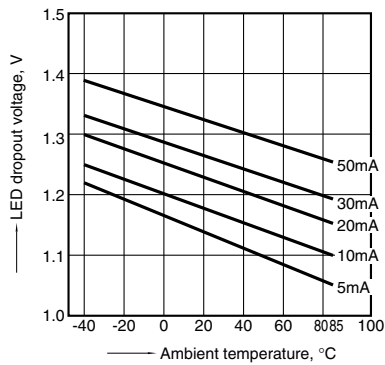


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

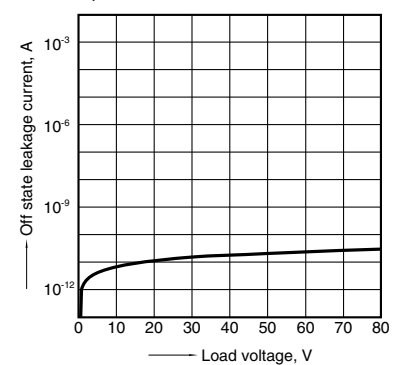


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

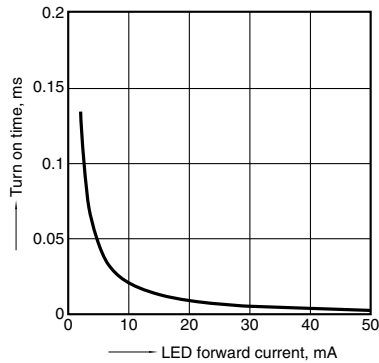


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

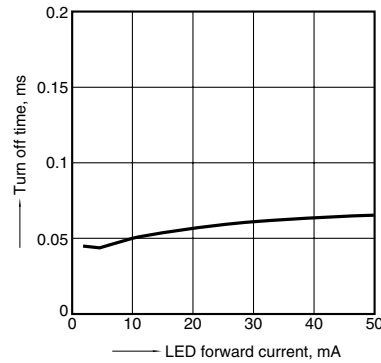

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30m Vrms; Ambient temperature: 25°C 77°F

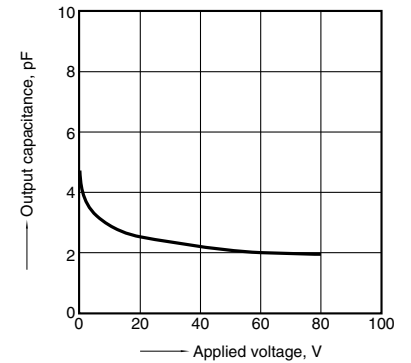

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQY225R1S](#) [AQY225R1SX](#) [AQY225R1SZ](#) [AQY225R2S](#) [AQY225R2SX](#) [AQY225R2SZ](#) [AQY225R2V](#)
[AQY225R2VW](#) [AQY225R2VY](#)