

## MICRO SWITCH Miniature Precision Limit Switches

14CE Series

002387

Issue 5

Datasheet



### DESCRIPTION

All MICRO SWITCH™ 14CE Series miniature precision switches incorporate fluorocarbon diaphragm sealing to provide reliable protection, meeting IP65, IP66, IP67, and IP68, as well as NEMA 1, 2, 3, 3R, 4, 6, 6P, and 13 requirements. Versions with a boot seal also meet NEMA 12 requirements (dust, falling dirt, liquid media with solid contaminants). The cable or connector and basic switch terminals are encapsulated in an epoxy sealant, offering excellent resistance in harsh environments. For low temperature applications (down to -40 °C, -40 °F), CE Series switches can be supplied with low temperature seals and lubricant.

The CE Series switches are rugged and versatile switches which can be applied indoors in many harsh factory floor applications, as well as on outdoor equipment in extreme temperatures. A full range of actuators are available, including pin plungers, roller plungers, side rotary, multi-directional wire, and manually operated. The switches are also available with the industry standard, M12 micro-change 4-pin connector. MICRO SWITCH 14CE products meet European and Asian CE requirements.

### VALUE TO CUSTOMERS

- Big performance in a small package
- Delivers consistent performance in many demanding environments where petroleum, synthetic, or water based fluids are present
- Product variation within defined nomenclature

### FEATURES

- Rugged, miniature construction means minimal real estate on equipment
- NEMA 1, 2, 3, 3R, 4, 6, 6P, 12 (boot seal), 13, and IP65/66/67/68 environmental sealing
- Pre-leaded (Cenelec cable) or supplied with a M12 four-pin connector
- Wide selection of actuators and cable length variations with side and bottom exit cable/connector options
- 25 mm mounting centers engineered with a MICRO SWITCH SM switch for consistent, precise actuation
- Well suited for up to 10 million actuation cycles (Up to 5 million actuation cycles for wobble actuators)
- Gang mounting capability to provide a multi-plunger limit switch
- Low temperature variants available for indoor and outdoor applications
- CE approvals for European and Asian use

### POTENTIAL APPLICATIONS

- Machine tools
- Off-road equipment
- Material handling
- Access and mobility solutions
- Textile machinery
- Robotics
- Packaging equipment
- Commercial appliances
- Print trade machinery
- Agricultural machinery

### DIFFERENTIATION

- Diaphragm seal between the actuator and the switch cavity for high performance sealing
- CE Series incorporates MICRO SWITCH SM basic switch for consistent, precise actuation
- Side exit termination for space constraints

### PORTFOLIO

Honeywell's MICRO SWITCH 14CE limit switch is part of a comprehensive offering of rugged and reliable limit switches. To view the entire product portfolio, click [here](#).

# MICRO SWITCH Miniature Precision Limit Switches, 14CE Series

**Table 1. Specifications**

| Characteristic                         | Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                            | compact enclosed limit switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Actuators                              | <ul style="list-style-type: none"> <li>• Top pin plunger (14CE1-)</li> <li>• Cross roller plunger (14CE3-)</li> <li>• Top pin plunger with boot seal (14CE18-)</li> <li>• Wobble (14CE20-)</li> <li>• Top pin plunger, panel mount (14CE27-)</li> <li>• Top roller plunger, parallel and panel mount (14CE28-)</li> <li>• Top roller plunger, perpendicular, panel mount (14CE29-)</li> <li>• Top roller plunger, parallel and boot sealed (14CE31-)</li> <li>• Top roller plunger, perpendicular, boot seal (14CE55-)</li> <li>• Parallel roller plunger (14CE2-)</li> <li>• Side rotary (14CE16-)</li> <li>• Top adjustable plunger (14CE19-)</li> <li>• Manually operated (14CE22-)</li> <li>• Ball bearing plunger (14CE66-)</li> </ul> |
| Terminations                           | Harmonized Cenelec PVC sheathed 4 x 0,75 mm <sup>2</sup> (18 AWG) cable<br>Connector (dc), 4-pin male, M12 thread (-Q)<br>Connector (ac), 4-pin male, 1/2 in x 20 thread (-Q1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Switching options                      | SPDT, snap action contacts (1NC/1NO) Form C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Sealing                                | IP65, IP66, IP67, IP68*<br>NEMA 1, 2, 3, 3R, 4, 6, 6P, 12 (boot seal), 13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operating temperature                  | 0 °C to 70 °C [32 °F to 158 °F]; optional -40 °C to 70 °C [-40 °F to 158 °F]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Mechanical life                        | up to 10 million; up to 5 million (wobble actuators) cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Thermal current                        | 1 A, 3 A, 5 A (depending upon model)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Rated insulation voltage (Ui)          | 250 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Rated impulse withstand voltage (Uimp) | 1.5 kV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Short circuit protection device (SCPD) | Quick blow fuse suitable for rated current of switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pollution degree                       | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Min. actuation speed                   | 0.003 m/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Max. actuation speed                   | 0.1 m/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Max. actuation frequency               | ac – 200 Hz; dc – 20 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Shock                                  | 50 g – IEC 60068-2-27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Vibration                              | 10 g – IEC 60068-2-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Approvals                              | CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Conforming to standards                | EN 60947-5-1; AC-14 D300, DC-13 R300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

\*IP68 sealing submerged in one meter of water for 24 hours


**Table 2. Electrical Ratings (in amperes)**

| Model example       | Contacts        | Rating                 |
|---------------------|-----------------|------------------------|
| 14CE_ _             | Silver contacts | A                      |
| 14CE_ _G            | Gold contacts   | B                      |
| 14CE_ -Q, -AQ, -AQ1 | Silver contacts | C with 4-pin connector |

| Rating code |                                  | Make | Break |
|-------------|----------------------------------|------|-------|
| A           | 240 Vac, ind.                    | 1.2  | 0.2   |
|             | 240 Vac, res.                    | 5    | 5     |
|             | 28 Vdc, res.                     | 3    | 3     |
|             | 28 Vdc, ind.                     | 3    | 3     |
|             | 5 A, 1/10 HP, 125 Vac or 250 Vac | –    | –     |
| B           | 5-25 mA<br>5-50 Vdc              | –    | –     |
| C           | 3 A, 125 Vac or 250 Vac          | –    | –     |

# MICRO SWITCH Miniature Precision Limit Switches, 14CE Series

## SWITCHING AND LEAD IDENTIFICATION

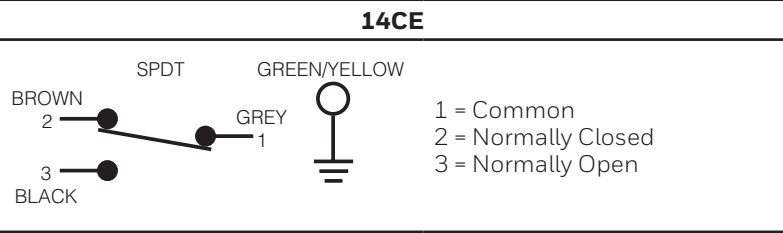


## PINOUTS

| Connector - (dc) (-Q) | Connector (ac) (-Q1) |
|-----------------------|----------------------|
|                       |                      |

## CONNECTOR VERSIONS

The 14CE Series is available with a 4-pin, M12 size connector in both bottom and side exit versions.

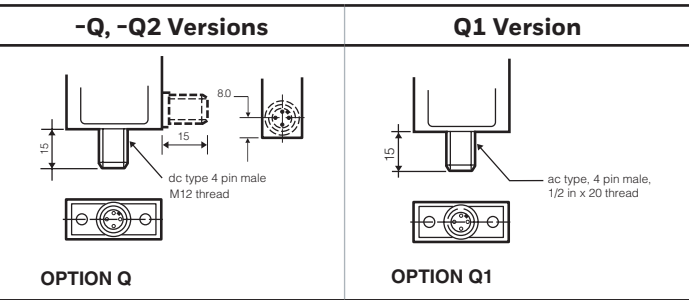

## MOUNTING

MICRO SWITCH 14CE Series switches are mounted by using two M5 screws. The mounting holes are counter bored to keep the screw heads within the overall switch housing dimensions.

## GANG MOUNT CAPABILITY

The housing on the 14CE Series has been designed to enable the user to build his own multiple plunger switch by gang mounting several switches. All pin plunger and roller plunger types are suitable for gang mounting. There is a 16 mm distance between the plungers. Both Series are very versatile that even a lever-type version could be added at the end of the row.

## BOTTOM EXIT OR SIDE EXIT ORIENTATION


The CE Series has been designed with a pre-wired cable or connector fitted in the bottom of the switch housing. Other variations are available with a side-exit cable or connector.

## GOLD CONTACT VERSIONS

For low energy applications, gold contact versions of the 14CE switches can be supplied upon request.

# MICRO SWITCH Miniature Precision Limit Switches, 14CE Series

## GENERAL DIMENSIONS • ALL SWITCHES

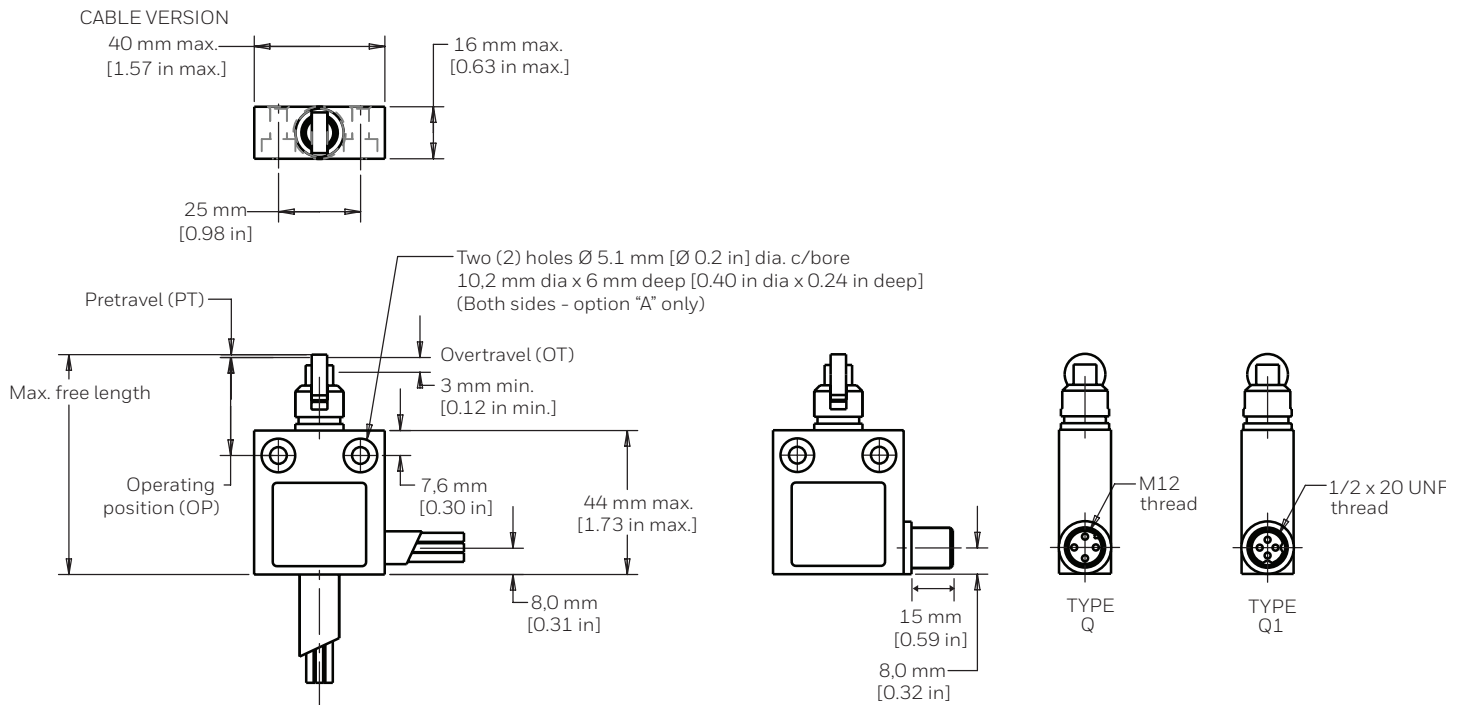

## PRODUCT NOMENCLATURE

14CE

Switch Type

14CE Series Compact Precision Limit Switch

16

Actuator Type

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| 1 Top pin plunger               | 22 Manually oper. nylon button              |
| 2 Top roller plunger, parallel  | 27 Top pin plunger, panel mount             |
| 3 Top roller plunger, perp.     | 28 Top roller plunger, parallel panel mount |
| 16 Side rotary                  | 29 Top roller plunger, perp. panel mount    |
| 18 Top pin plunger w/ boot seal | 31 Top roller plunger, parallel boot seal   |
| 19 Top adjustable pin plunger   | 55 Top roller plunger, perp. boot seal      |
| 20 Coil wobble                  | 66 Top ball bearing plunger                 |

3

Cable Length\*

|            |
|------------|
| 1 1 meter  |
| 2 2 meters |
| 3 3 meters |
| 4 4 meters |
| 5 5 meters |

Options<sup>1,2</sup>

|                                                                     |
|---------------------------------------------------------------------|
| A Side entry                                                        |
| B Elongated mounting holes                                          |
| D Halogen-free cable                                                |
| G Gold contacts                                                     |
| H High temp., 150 °C                                                |
| L Low temp., -40 °C switch and cable                                |
| L1 Low temp., -40 °C, cable not for flexing                         |
| P Top mounting                                                      |
| V Viton® seals/gasket (side rotary and booted sealed plungers only) |

Connectors\* (micro type)

|                                           |
|-------------------------------------------|
| Q dc type single keyway 4-pin male, M12   |
| Q1 ac type two keyways 4-pin male, 1/2-20 |

OTE: not all combinations of model codes are available. Please contact your Honeywell provider/representative for assistance.

More than one option may be permissible.

Select "Cable Length" or "Connectors"

NOTE: not all combinations of model codes are available.  
Please contact your Honeywell provider/representative for assistance.

<sup>1</sup>More than one option may be permissible.

\* Select "Cable Length" or "Connectors"

<sup>2</sup>OPTION K to be discontinued. Replaced with fluorocarbon diaphragm seal, standard switch.

<sup>2</sup>OPTION KV to be discontinued. Replaced with fluorocarbon diaphragm seal, standard switch.

Bottom exit is standard.

# MICRO SWITCH Miniature Precision Limit Switches, 14CE Series



## PRODUCT SPECIFICATIONS AND LISTINGS

Contact your Honeywell rep or distributor for additional listings


| <b>14CE1 • Pin Plunger</b><br><b>14CE27 • Pin Plunger Panel Mount</b> |                                                                                                                                                                                                                                         | Con-<br>tacts | Elec<br>Rating | Cable/<br>Connector<br>Position | Free Posi-<br>tion (FP) | Operating<br>Position<br>(OP) | Options                 | Listing          |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------|---------------------------------|-------------------------|-------------------------------|-------------------------|------------------|
|                                                                       | 17,5 15,7 12,7<br>GRY-BRN<br>GRY-BLK<br>GRY-BLK<br>GRY-BRN<br>15,8<br><b>Pretravel • 1,8 mm [0.071 in]</b><br><b>Diff. travel • 0,1 mm [0.004 in]</b><br><b>Overtravel • 3,0 mm [0.118 in]</b><br><b>Oper. force • 11,8 N [2.65 lb]</b> | Silver        | A              | Bottom                          | 17,5 mm<br>[0.69 in]    | 15,7 mm<br>[0.62 in]          | –                       | <b>14CE1-1</b>   |
|                                                                       |                                                                                                                                                                                                                                         | Gold          | B              | Bottom                          | 17,5 mm<br>[0.69 in]    | 15,7 mm<br>[0.62 in]          | Gold-plated<br>contacts | <b>14CE1-1G</b>  |
|                                                                       |                                                                                                                                                                                                                                         | Silver        | A              | Side                            | 17,5 mm<br>[0.69 in]    | 15,7 mm<br>[0.62 in]          | Side exit cable         | <b>14CE1-1A</b>  |
|                                                                       |                                                                                                                                                                                                                                         | Silver        | C              | Bottom                          | 17,5 mm<br>[0.69 in]    | 15,7 mm<br>[0.62 in]          | dc-type<br>connector    | <b>14CE1-Q</b>   |
|                                                                       | 31,1 29,3 26,3<br>GRY-BRN<br>GRY-BLK<br>GRY-BLK<br>GRY-BRN<br>29,4                                                                                                                                                                      | Silver        | A              | Bottom                          | 31,1 mm<br>[1.23 in]    | 29,3 mm<br>[1.15 in]          | Panel mount             | <b>14CE27-1</b>  |
| <b>14CE18 • Boot Sealed Pin Plunger</b>                               |                                                                                                                                                                                                                                         | Con-<br>tacts | Elec<br>Rating | Cable/<br>Connector<br>Position | Free Posi-<br>tion (FP) | Operating<br>Position<br>(OP) | Options                 | Listing          |
|                                                                       | 26,7 24,9 21,9<br>GRY-BRN<br>GRY-BLK<br>GRY-BLK<br>GRY-BRN<br>25<br><b>Pretravel • 1,8 mm [0.071 in]</b><br><b>Diff. travel • 0,1 mm [0.004 in]</b><br><b>Overtravel • 3,0 mm [0.118 in]</b><br><b>Oper. force • 22,5 N [5.06 lb]</b>   | Silver        | A              | Bottom                          | 26,7 mm<br>[1.05 in]    | 24,9 mm<br>[0.98 in]          | –                       | <b>14CE18-1</b>  |
|                                                                       |                                                                                                                                                                                                                                         | Silver        | A              | Side                            | 26,7 mm<br>[1.05 in]    | 24,9 mm<br>[0.98 in]          | Side exit cable         | <b>14CE18-1A</b> |
|                                                                       |                                                                                                                                                                                                                                         | Silver        | C              | Bottom                          | 26,7 mm<br>[1.05 in]    | 24,9 mm<br>[0.98 in]          | dc-type<br>connector    | <b>14CE18-Q</b>  |
| <b>14CE66 • Ball Bearing Plunger</b>                                  |                                                                                                                                                                                                                                         | Con-<br>tacts | Elec<br>Rating | Cable/<br>Connector<br>Position | Free Posi-<br>tion (FP) | Operating<br>Position<br>(OP) | Options                 | Listing          |
|                                                                       | 26,2 24,4 21,4<br>GRY-BRN<br>GRY-BLK<br>GRY-BLK<br>GRY-BRN<br>24,5<br><b>Pretravel • 1,8 mm [0.071 in]</b><br><b>Diff. travel • 0,1 mm [0.004 in]</b><br><b>Overtravel • 3,0 mm [0.118 in]</b><br><b>Oper. force • 11,8 N [2.65 lb]</b> | Silver        | A              | Bottom                          | 26,2 mm<br>[1.03 in]    | 24,4 mm<br>[0.96 in]          | –                       | <b>14CE66-1</b>  |
|                                                                       |                                                                                                                                                                                                                                         | Silver        | A              | Side                            | 26,2 mm<br>[1.03 in]    | 24,4 mm<br>[0.96 in]          | Side exit cable         | <b>14CE66-1A</b> |

# MICRO SWITCH Miniature Precision Limit Switches, 14CE Series

## 14CE2 • Roller Plunger 14CE28 • Roller Plunger Panel Mount


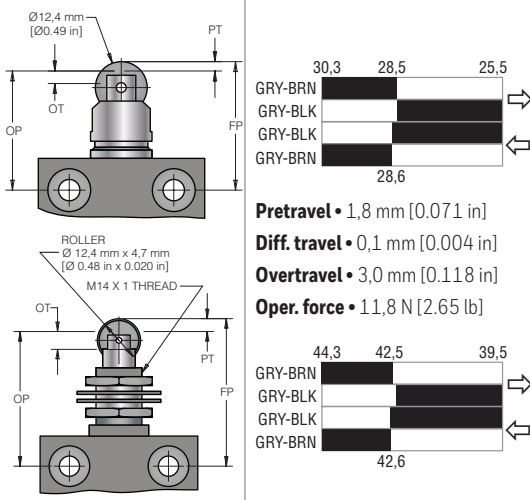


**Pretravel** • 1,8 mm [0.071 in]  
**Diff. travel** • 0,1 mm [0.004 in]  
**Overtravel** • 3,0 mm [0.118 in]  
**Oper. force** • 11,8 N [2.65 lb]



| Con-tacts | Elec Rating | Cable/ Connector Position | Free Posi-tion (FP) | Operating Position (OP) | Options                | Listing         |
|-----------|-------------|---------------------------|---------------------|-------------------------|------------------------|-----------------|
| Silver    | A           | Bottom                    | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | –                      | <b>14CE2-1</b>  |
| Gold      | B           | Bottom                    | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | Gold-plated contacts   | <b>14CE2-1G</b> |
| Silver    | C           | Bottom                    | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | dc-type connector      | <b>14CE2-Q</b>  |
| Silver    | A           | Side                      | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | Side exit cable        | <b>14CE2-1A</b> |
| Silver    | A           | Bottom                    | 44,3 mm [1.75 in]   | 42,5 mm [1.67 in]       | Panel mount, 2 m cable | <b>14CE28-2</b> |



## 14CE31 • Boot Sealed Roller Plunger

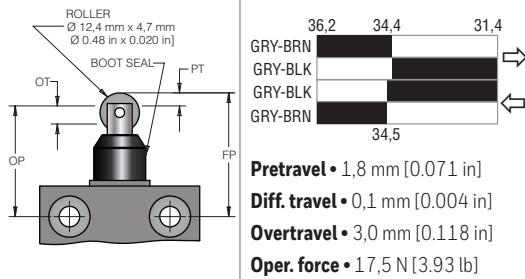

**Pretravel** • 1,8 mm [0.071 in]  
**Diff. travel** • 0,1 mm [0.004 in]  
**Overtravel** • 3,0 mm [0.118 in]  
**Oper. force** • 17,5 N [3.93 lb]

| Con-tacts | Elec Rating | Cable/ Connector Position | Free Posi-tion (FP) | Operating Position (OP) | Options                       | Listing          |
|-----------|-------------|---------------------------|---------------------|-------------------------|-------------------------------|------------------|
| Silver    | A           | Bottom                    | 36,2 mm [1.43 in]   | 34,4 mm [1.36 in]       | –                             | <b>14CE31-1</b>  |
| Silver    | A           | Bottom                    | 36,2 mm [1.43 in]   | 34,4 mm [1.36 in]       | Fluorocarbon seals, 6 m cable | <b>14CE31-6V</b> |




## 14CE3 • Cross Roller Plunger

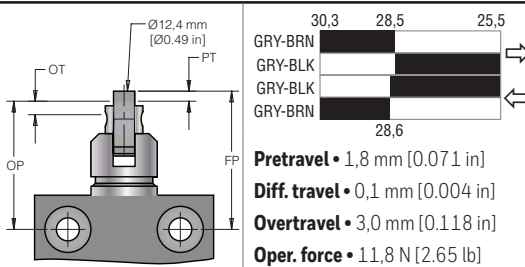

**Pretravel** • 1,8 mm [0.071 in]  
**Diff. travel** • 0,1 mm [0.004 in]  
**Overtravel** • 3,0 mm [0.118 in]  
**Oper. force** • 11,8 N [2.65 lb]

| Con-tacts | Elec Rating | Cable/ Connector Position | Free Posi-tion (FP) | Operating Position (OP) | Options                 | Listing         |
|-----------|-------------|---------------------------|---------------------|-------------------------|-------------------------|-----------------|
| Silver    | A           | Bottom                    | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | –                       | <b>14CE3-1</b>  |
| Silver    | A           | Side                      | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | 3 m of cable, side exit | <b>14CE3-3A</b> |
| Silver    | C           | Bottom                    | 30,3 mm [1.19 in]   | 28,5 mm [1.12 in]       | dc-type connector       | <b>14CE3-Q</b>  |

# MICRO SWITCH Miniature Precision Limit Switches, 14CE Series

| <b>14CE55 • Boot Sealed Cross Roller Plunger</b>                                                                                                                                                                             |                                                                                                                                                                                                                                                        | Con-tacts | Elec Rating | Cable/ Connector Position | Free Posi-tion (FP)  | Operating Position (OP) | Options                                    | Listing                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------|---------------------------|----------------------|-------------------------|--------------------------------------------|------------------------------|
|  <p>ROLLER<br/>Ø 12,4 mm x 4,7 mm<br/>Ø 0.48 in x 0.020 in</p> <p>BOOT SEAL</p> <p>PT</p> <p>OT</p> <p>OP</p> <p>FP</p>                     | <p>36,2 34,4 31,4</p> <p>GRY-BRN</p> <p>GRY-BLK</p> <p>GRY-BLK</p> <p>GRY-BRN</p> <p>34,5</p> <p>Pretravel • 1,8 mm [0.071 in]</p> <p>Diff. travel • 0,1 mm [0.004 in]</p> <p>Overtravel • 3,0 mm [0.118 in]</p> <p>Oper. force • 17,5 N [3.93 lb]</p> | Silver    | A           | Bottom                    | 36,2 mm<br>[1.43 in] | 34,4 mm<br>[1.36 in]    | 3 meters of cable                          | <b>14CE55-3</b>              |
|                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                        |           |             |                           |                      |                         |                                            |                              |
| <b>14CE16 • Side Rotary</b>                                                                                                                                                                                                  |                                                                                                                                                                                                                                                        | Con-tacts | Elec Rating | Cable/ Connector Position | Free Posi-tion (FP)  | Operating Position (OP) | Options                                    | Listing                      |
|  <p>PT</p> <p>FP</p> <p>PT</p> <p>OT</p> <p>OT</p> <p>OT</p> <p>Actuator shaft<br/>Ø7,22 mm<br/>[0.288 in]</p> <p>18,9 mm<br/>[0.74 in]</p> | <p>0° 30° 70°</p> <p>GRY-BRN</p> <p>GRY-BLK</p> <p>GRY-BLK</p> <p>GRY-BRN</p> <p>27°</p> <p>Pretravel • 30°</p> <p>Diff. travel • 3°</p> <p>Overtravel • 40°</p> <p>Oper. force • 0,34 Nm [3 in-lb]</p>                                                | Silver    | A           | Bottom                    | 0°                   | 30°                     | –                                          | <b>14CE16-1<sup>1</sup></b>  |
|                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                        | Gold      | B           | Bottom                    | 0°                   | 30°                     | Gold-plated contacts,<br>3 meters of cable | <b>14CE16-3G<sup>1</sup></b> |
|                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                        | Silver    | C           | Bottom                    | 0°                   | 30°                     | dc-type connector                          | <b>14CE16-Q<sup>1</sup></b>  |
| <b>14CE20 • Random Motion Wire Actuator</b>                                                                                                                                                                                  |                                                                                                                                                                                                                                                        | Con-tacts | Elec Rating | Cable/ Connector Position | Free Posi-tion (FP)  | Operating Position (OP) | Options                                    | Listing                      |
|  <p>OP</p> <p>ALL DIRECTIONS EXCEPT DIRECT PULL</p> <p>Ø1,8 mm<br/>[Ø0.07 in]</p> <p>335,0 mm max.<br/>[13.98 mm max.]</p>                | <p>0 28 max.</p> <p>GRY-BRN</p> <p>GRY-BLK</p> <p>GRY-BLK</p> <p>GRY-BRN</p> <p>Oper. position • 28 mm [1.10 in] max.</p> <p>Oper. force • 0,55 N [0.12 lb] max.</p>                                                                                   | Silver    | A           | Bottom                    | –                    | 28 mm<br>[1.10 in] max. | –                                          | <b>14CE20-1</b>              |
|                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                        |           |             |                           |                      |                         |                                            |                              |

<sup>1</sup> Switch operates on clockwise and counterclockwise rotation of lever shaft

Note: Most part numbers are shown with 1 meter of cable. The -X indicates the number of meters of cable provided: 2-meters, 3-meters, 4-meters, and 5-meters. Custom lengths are also available.

## MICRO SWITCH Miniature Precision Limit Switches, 14CE Series

Table 3. Levers for Use with 14CE Side Rotary Switches

|                                                                                    | Catalog Listing | Roller Material | Roller Dia. mm [in] | Roller Width mm [in] |
|------------------------------------------------------------------------------------|-----------------|-----------------|---------------------|----------------------|
| <b>Fixed length lever; 38,1 mm [1.5 in] radius</b>                                 |                 |                 |                     |                      |
|   | GLZ51A          | Nylon           | 19,0 [0.75]         | 6,35 [0.25]          |
|                                                                                    | GLZ51B          | Steel           | 19,0 [0.75]         | 6,35 [0.25]          |
|                                                                                    | GLZ51C          | Nylon           | 25,4 [1.00]         | 12,7 [0.50]          |
|                                                                                    | GLZ51E          | Bronze          | 19,0 [0.75]         | 6,35 [0.25]          |
|                                                                                    | GLZ51T          | SST             | 19,0 [0.75]         | 9,5 [0.38]           |
| <b>Fixed length offset lever; 38,1 mm [1.5 in] radius</b>                          |                 |                 |                     |                      |
|   | GLZ55A          | Nylon           | 19,0 [0.75]         | 6,35 [0.25]          |
|                                                                                    | GLZ55B          | Steel           | 19,0 [0.75]         | 6,35 [0.25]          |
|                                                                                    | GLZ55E          | Bronze          | 19,0 [0.75]         | 6,35 [0.25]          |
| <b>Adjustable 38,1 mm to 89,0 mm [1.5 in to 3.5 in] radius</b>                     |                 |                 |                     |                      |
|  | GLZ52A          | Nylon           | 19,0 [0.75]         | 6,35 [0.25]          |
|                                                                                    | GLZ52B          | Steel           | 19,0 [0.75]         | 6,35 [0.25]          |