

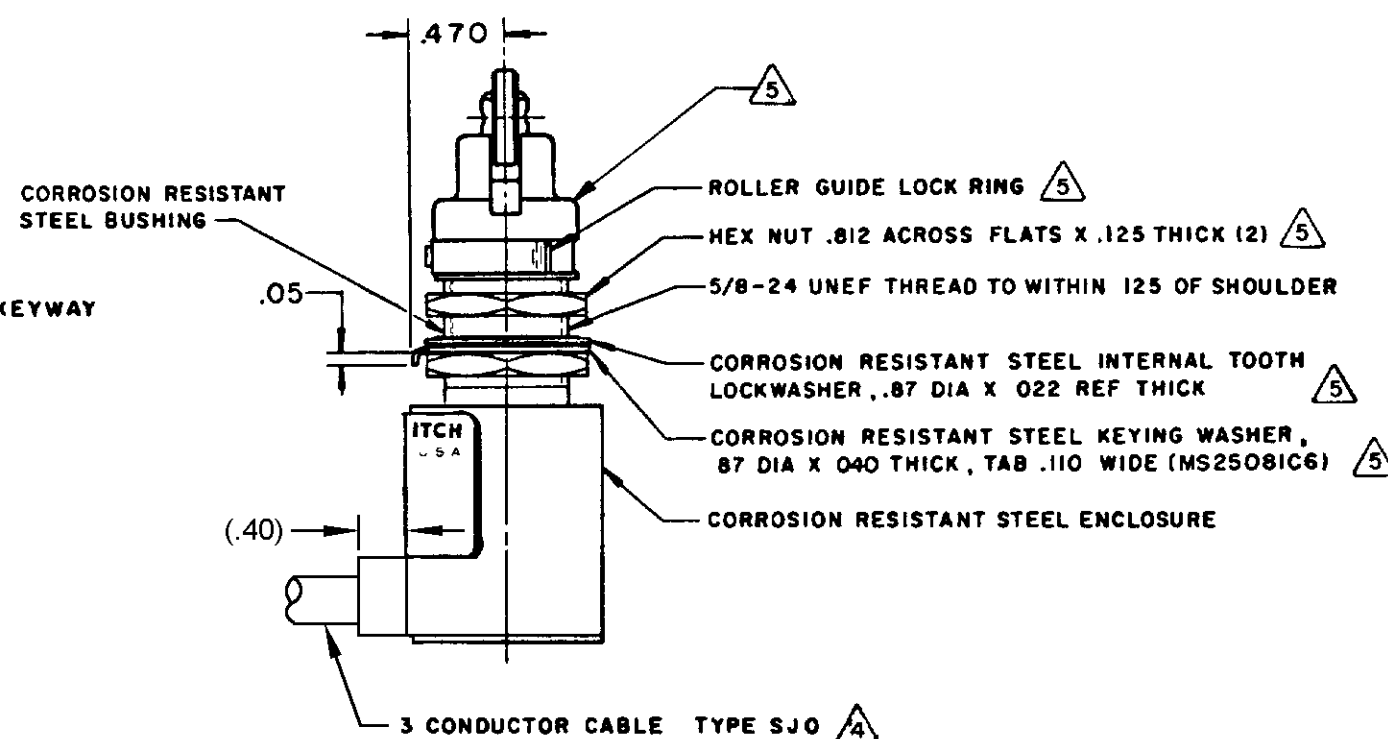
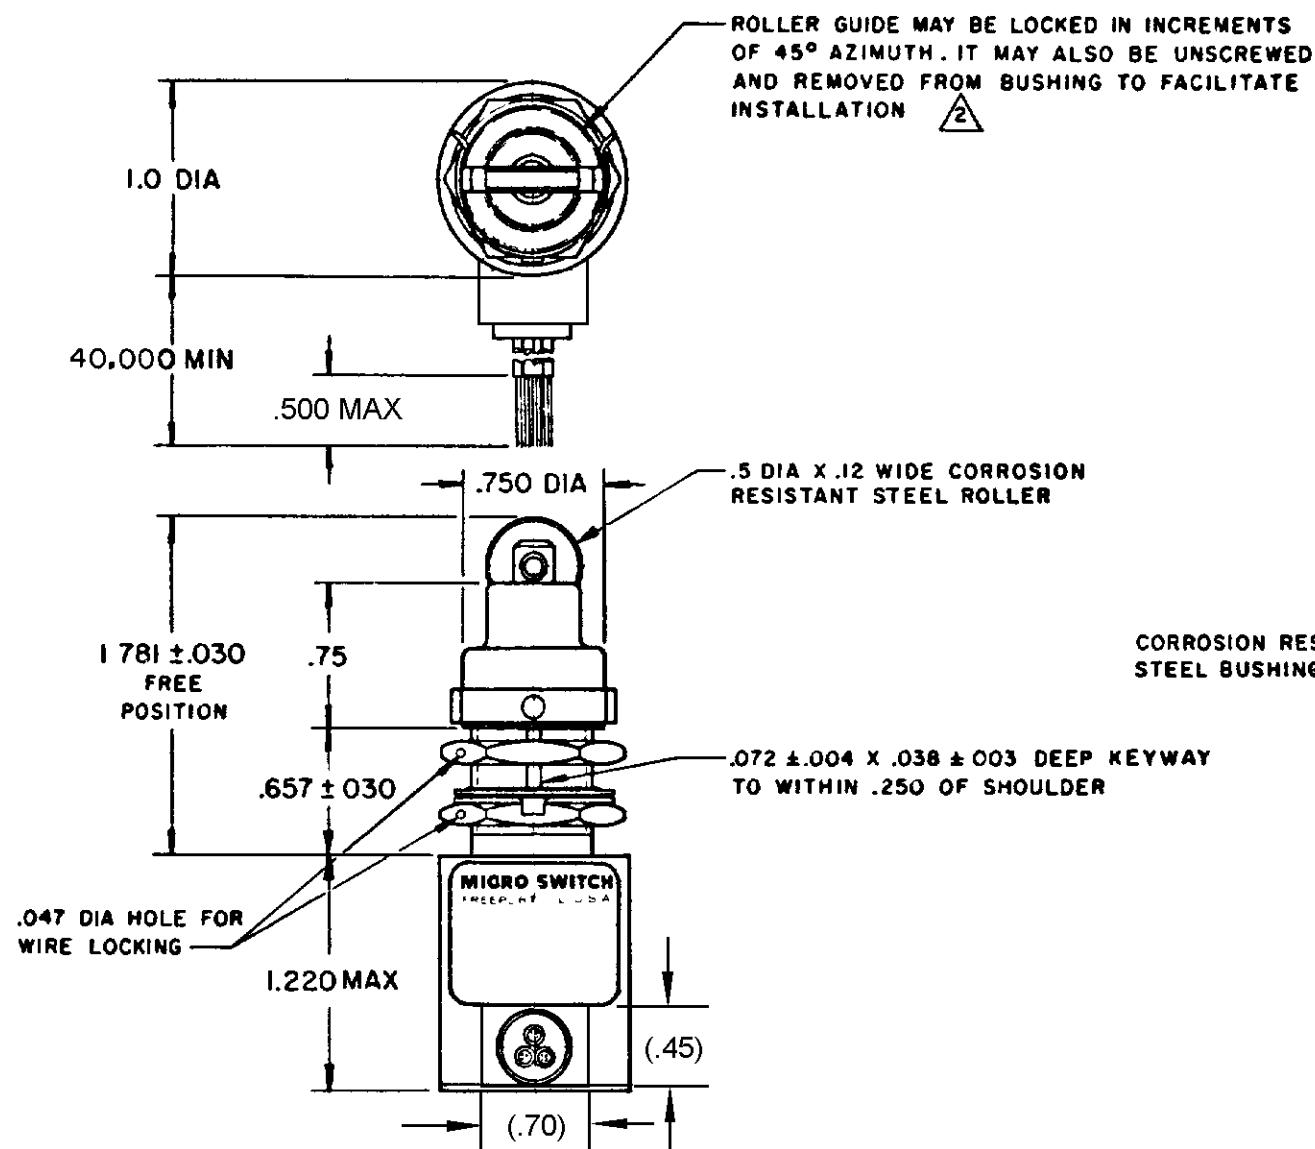
MICRO SWITCH

FED. MFR CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
21 CH 28BLACK ——— WHITE
GREEN ———

CIRCUIT DIAGRAM

Промэлектроника
sales@prom-elec.com

NOTES

- 1 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3
- 2 - TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
- 3 - CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ARE SHOWN ON NAMEPLATE
- 4 - LEAD WIRES COLOR CODED TO SHOW LEAD IDENTIFICATION
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL	
OPERATING FORCE -----6-12 LB		CONTACT ARRANGEMENT		DO NOT SCALE PRINT		
FULL OVERTRAVEL FORCE ----- 30 LB MAX		S P D T				
RELEASE FORCE ----- 4 LB MIN		LOAD	28 VDC			
PRETRAVEL ----- .040 MAX			SEA LEVEL		50,000 FT.	
DIFFERENTIAL TRAVEL ----- .020 MAX			RES	4	4	
OVERTRAVEL ----- .250 MIN			IND	2	2	
			MOTOR	4		
					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) 2.000 TWO PLACE (.00) 2.018 THREE PLACE (.000) 2.008 ANGLES 2	
					WEIGHT 9.0 OZ MAX	