

MICRO SWITCH Hermetic Sealed Basic Switches

DESCRIPTION

Honeywell HM hermetic sealed miniature basic switches are designed for a variety of commercial and military aircraft as well as equipment for deep space applications. These miniature hermetic sealed switches can be found in a variety of other applications including military land vehicles, marine environments, and other harsh industrial environments. The switches are available as a MIL-PRF-8805 qualified switch. Select HM switches are available with UL 508 certification for industrial or surface transportation applications. The MICRO SWITCH HM hermetic sealed switch design incorporates the glass-to-metal and metal-to-metal sealing with more than 50 years of use in industries, environments, and applications.

The hermetically sealed HM basic switches are ideal where a symbol 5 seal is required for stringent applications including a wide range of temperatures from -184°C to 260°C [-300°F to 500°F]. Designed with a stainless steel housing and hermetic seal construction, the HM switches are suitable for applications where dust, water, other particulate contaminants, and corrosive gases are present.


The HM basic switch provides versatility with bifurcated gold contacts for controlling low-energy loads (mA and mV) reliably, silver contacts for switching power duty loads at 30 Vdc or 115 Vac, 400 Hz, or and silver-alloy contacts (specified to builds within 5HM/6HM series). Electrical connectivity to the switch is achieved with individual wire leads or "through hole" solder posts adding to the versatility of the HM switch.

FEATURES

- **MIL-qualified:** MICRO SWITCH HM switches are hermetically sealed with versions that are MIL-PRF-8805 qualified for demanding military or commercial applications on aircraft, spacecraft, or ground vehicles
- **UL certified:** Select HM catalog listings are UL 508 certified for industrial and surface transportation applications.
- **Tiny:** Miniature package size requires minimal space on equipment
- **Sealed tight:** HM Series' symbol 5 hermetic-sealed enclosures are suitable for applications at sea level, high altitude, or deep space
- **Low voltage and power duty capability:** MICRO SWITCH HM products are available with silver contacts for control of power-duty circuits or gold contact surfaces for control of logic level circuits
- **Levers further expand functionality:** Auxiliary actuators expand the versatility of the switch for additional applications
- **Well suited for low and high temperatures:** For endurance in harsh temperature environments, wide temperature range is available from -184°C to 260°C [-300°F to 500°F]. Operate point stability is maintained over the specified temperature range

USE CASE EXAMPLES

- Military aircraft and helicopters
- Commercial aircraft and helicopters
- Aviation ground support equipment
- Spacecraft
- Power generation, oil and gas

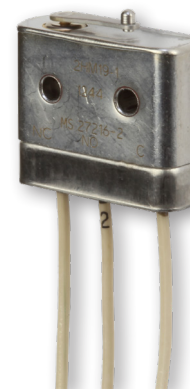

VALUE TO CUSTOMERS

- Precisely detects position of mechanical components within a particular system that is susceptible to physical and atmospheric (corrosive gas, oxygen, etc.) elements
- Consistent and precise performance in a hermetic-sealed package for adverse, inclement environments
- Functionality over a large temperature range – can tolerate very low and high temperatures
- Honeywell can create value-added HM assemblies for unique, custom applications beyond a simple HM switch
- HM switches are available with MIL-PRF-8805 qualifications or UL 508 certifications

PORTFOLIO

Honeywell's HM Series is part of a comprehensive line of aerospace sensors, switches, and value-added solutions. To view the Honeywell complete product offering, [click here](#).

MICRO SWITCH HERMETIC SEALED BASIC SWITCHES

HM SERIES

TABLE 1. SPECIFICATIONS

Characteristic	Parameter
Description	Hermetic sealed miniature snap-action switch
Housing material	300 series stainless steel
Mechanical endurance	25,000 operations min.
Electrical endurance	25,000 operations min.
Dielectric voltage (initial)	1000 Vrms for 1 minute
Circuitry	SPDT
Contact material	Silver, silver alloy, gold, gold bifurcated
Electrical rating	Up to 4 A at 28 Vdc (ref. electrical rating table)
Sealing	Symbol 5, hermetic sealed to MIL-PRF-8805
Temperature range	-65°C to 121°C [-85°F to 250°F] (see catalog listing table)
Temperature range (optional)	-184°C to 260°C [-300°F to 500°F] (see catalog listing table)
Vibration	Symbol 2 (15 g), 10 to 2000 Hz
Mechanical shock	Shock type M (100 G, saw tooth)
Approvals (refer to page 7)	MIL-PRF-8805, UL 508 (File E66520)
Actuators (auxiliary)	Straight leaf, roller leaf, straight lever, roller lever

TABLE 2. ELECTRICAL RATINGS

Rating code	Parameter
A	Sea level @ 28 Vdc; 3 A res. and 1 A ind. 70,000 feet @ 28 Vdc; 3 A res. and 1 A ind. Sea level @ 115 Vac & 400 Hz; 1 A res. and 1 A ind.
B	Sea level @ 28 Vdc; 1 A res. and 0.25 A ind. 70,000 feet @ 28 Vdc; 1 A res. and 0.25 A ind.
C	Sea level @ 28 Vdc; 0.5 A res. and 0.25 A ind. 70,000 feet @ 28 Vdc; 0.5 A res. and 0.25 A ind.
D	Sea level @ 28 Vdc; 4 A res., 2 A ind. and 1 A lamp 70,000 feet @ 28 Vdc; 4 A res., 2 A ind. and 1 A lamp Sea level @ 115 Vac & 400 Hz; 2 A res., 2 A ind. and 0.5 A lamp
E	Sea level @ 28 Vdc; 4 res. and 2 A ind. Sea level @ 115 Vac and 400 Hz; 2.5 A res. and 2.5 A ind.

TABLE 3. UL 508 ELECTRICAL RATINGS

Rating code	Parameter
F	28 Vdc, 0.5 A res.; -65°C to 125°C [-85°F to 257°F]
G	28 Vdc, 3 A res.; -65°C to 125°C [-85°F to 257°F]
H	28 Vdc, 0.5 A res.; -65°C to 260°C [-85°F to 500°F]
J	28 Vdc, 4 A res.; -65°C to 260°C [-85°F to 500°F]

MICRO SWITCH HERMETIC SEALED BASIC SWITCHES

HM SERIES

ELECTROMECHANICAL SWITCHES

Definitions below explain the meaning of operating characteristics. Characteristics shown in tables were chosen as most significant. They are taken at normal room temperature and humidity. These may vary as temperature and humidity conditions differ. Sketches show how characteristics are measured for in-line plunger actuation.

Linear dimensions for in-line actuation are from top of plunger to a reference line, usually the center of the mounting holes.

Differential Travel (D.T.) – Plunger or actuator travel from point where contacts “snap-over” to point where they “snap-back.”

Free Position (F.P.) – Position of switch plunger or actuator when no external force is applied (other than gravity).

Full Overtravel Force – Force required to attain full overtravel of actuator.

Operating Position (O.P.) – Position of switch plunger or actuator at which point contacts snap from normal to operated position. Note that in the case of flexible or adjustable actuators, the operating position is measured from the end of the lever or its maximum length. Location of operating position measurement shown on mounting dimension drawings.

Operating Force (O.F.) – Amount of force applied to switch plunger or actuator to cause contact “snap-over.” Note in the case of adjustable actuators, the force is measured from the maximum length position of the lever.


Overtravel (O.T.) – Plunger or actuator travel safely available beyond operating position.

Pretravel (P.T.) – Distance or angle traveled in moving plunger or actuator from free position to operating position.

Release Force (R.F.) – Amount of force still applied to switch plunger or actuator at moment contacts snap from operated position to unoperated position.

Total Travel (T.T.) – Distance from actuator free position to overtravel limit position.

IN-LINE PLUNGER ACTUATION

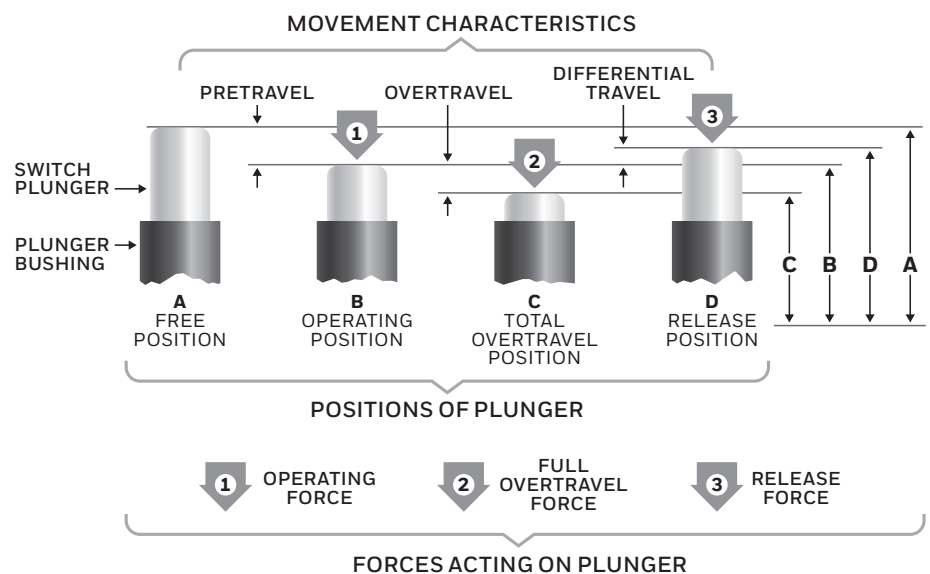

MICRO SWITCH HERMETIC SEALED BASIC SWITCHES

HM SERIES

TABLE 4. MICRO SWITCH HM SERIES PRODUCT SPECIFICATIONS AND LISTINGS

Contact your Honeywell rep or distributor for additional listings

	Catalog Listing	Elect. Rating Spec. (page 5)	Temperature range	Termination	O.F. - Operating force R.F. - Release force		P.T. - Pretravel O.T. - Overtravel		D.T. - Differential travel O.P. - Operating position		Comment
					O.F. max. g [oz]	R.F. max. g [oz]	P.T. max. mm [in]	O.T. min. mm [in]	D.T. max. mm [in]	O.P. mm [in]	
	11HM1 [MS 27216-5]	A	-184°C to 121°C [-300°F to 250°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	MIL-PRF-8805 applications
	11HM1 [UL 508]	G	-65°C to 125°C [-85°F to 257°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	UL 508 applications
	13HM1	B	-184°C to 121°C [-300°F to 250°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	Gold contacts
	9HM1 [MS27216-6]	C	-184°C to 121°C [-300°F to 250°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	MIL-PRF-8805, bifurcated gold contacts
	9HM1 [UL 508]	F	-65°C to 125°C [-85°F to 257°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	UL 508 applications, bifurcated gold contacts
	2HM19-1 [MS27216-2]	D	-65°C to 125°C [-85°F to 257°F]	Wire leads (3) 305 mm [12 in]	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	MIL-PRF-8805 applications
	2HM19-5 [MS27216-4]	D	-65°C to 125°C [-85°F to 257°F]	Wire leads (3) 1524 mm [60 in]	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	MIL-PRF-8805 applications
	16HM1-1	A	-65°C to 260°C [-85°F to 500°F] (-184°C [-300°F] if wires non-flexing)	Wire leads (3) 305 mm [12 in]	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	Up to 260°C [500°F]
	15HM2	A	-65°C to 260°C [-85°F to 500°F]	Thru-hole post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	Up to 260°C [500°F]
	15HM5	A	-184°C to 260°C [-300°F to 500°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,10 [0.004]	8,38 [0.33]	Up to 260°C [500°F]
	5HM1	E	-184°C to 260°C [-300°F to 500°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	Up to 260°C [500°F]
	5HM1 [UL 508]	J	-65°C to 260°C [-85°F to 500°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	UL 508 applications
	19HM1	C	-184°C to 260°C [-300°F to 500°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	Up to 260°C [500°F]
	19HM1 [UL 508]	H	-65°C to 260°C [-85°F to 500°F]	Thru-hole solder post	198 [7]	28 [1]	0,76 [0.03]	0,08 [0.003]	0,15 [0.006]	8,38 [0.33]	UL 508 applications
	19PA137 HM*	—	—	—	—	—	—	—	—	—	Force spreading plate

* Recommended to minimize force on housing of HM switch and any resulting damage to switch housing.

Note: Torque on #2 mounting screws must not exceed 0,17 Nm [1.5 in-lb]. The force spreading plate, 19PA137-HM, will allow up to 0,28 Nm [2.5 in-lb] of mounting torque.

MICRO SWITCH HERMETIC SEALED BASIC SWITCHES
HM SERIES

JS SERIES LEVERS SPECIFICATIONS* (WHEN ASSEMBLED TO 16HM1-1)										
		Description	Actuator Length mm [in]	Operating Force max. g [oz]	Release Force min. g [oz]	Pretravel nom. mm [in]	Overtravel min. mm [in]	Differential Travel max. mm [in]	Operating Point nom. mm [in]	Free Position nom. mm [in]
JS-254		Straight leaf	8,13 [0.32]	255 [9]	57 [2]	3,56 [0.14]	0,76 [0.03]	0,76 [0.03]	8,64 [0.34]	12,2 [0.48]
JS-151		Roller leaf (mounting hardware included)	8,13 [0.32]	255 [9]	57 [2]	3,56 [0.14]	0,76 [0.03]	0,76 [0.03]	14 [0.55]	17,5 [0.69]
JS-307		Straight lever (mounting hardware included)	26,16 [1.03]	43 [1.5]	3 [0.11]	3,18 [0.125]	0,64 [0.025]	1,42 [0.056]	10,3 [0.406]	13,49 [0.531]
JS-308		Roller lever (mounting hardware included)	25,4 [1.00] radius	43 [1.5]	3 [0.11]	3,18 [0.125]	0,64 [0.025]	1,42 [0.056]	14,3 [0.562]	17,45 [0.687]

* Stainless steel actuators, including roller and mounting hardware (when provided).

MICRO SWITCH HERMETIC SEALED BASIC SWITCHES HM SERIES

PRODUCT AND ACTUATOR DIMENSIONS

Figure 1. MICRO SWITCH HM, Solder Terminal

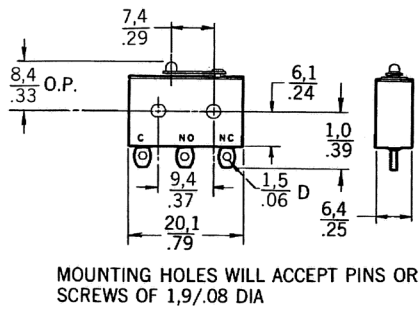


Figure 2. MICRO SWITCH HM, Wire Leads




Figure 3. MICRO SWITCH HM, Wire Leads

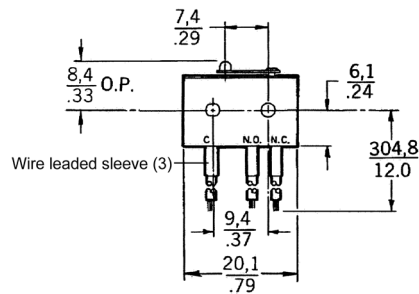


Figure 4. JS-254 Dimensions

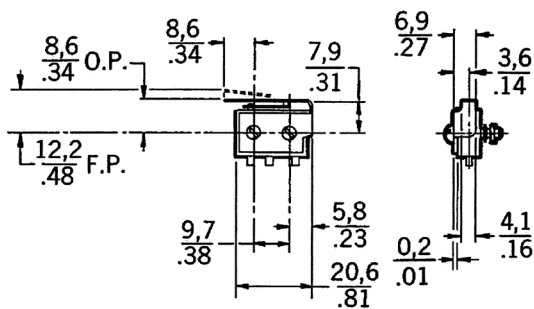


Figure 5. JS-151 Dimensions

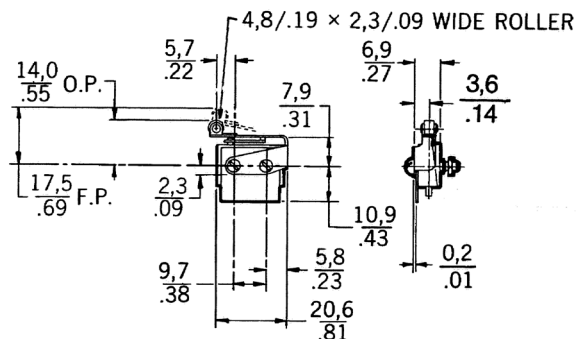


Figure 6. JS-307 Dimensions





Figure 7. JS-308 Dimensions

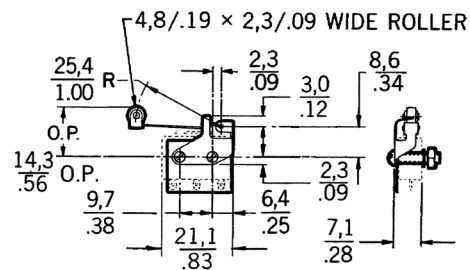

Key: 0,0 = mm
0.00 = inches

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. The Honeywell standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide information or engineering support for its products through Honeywell personnel, literature and website, it is the buyer's sole responsibility to determine the suitability of the Honeywell product(s) for the buyer's requirements.

Specifications may change without notice. The information we supply is believed to be accurate as of this writing. However, Honeywell assumes no responsibility for its use.

For more information

Honeywell Sensing Solutions services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing, or the nearest Authorized Distributor, visit automation.honeywell.com/hss or call:

USA/Canada	+302 613 4491
Latin America	+1 305 805 8188
Europe	+44 1344 238258
Japan	+81 (0) 3-6730-7152
Singapore	+65 6355 2828
Greater China	+86 4006396841

Honeywell Sensing Solutions

830 East Arapaho Road
Richardson, TX 75081
www.honeywell.com

WARNING PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.