
# **Panasonic**



## Slim type SSR for 1 A and 2 A control

### **AQ-G RELAYS**



**RoHS** compliant

#### **FEATURES**

- 1. Space saving, Vertical size with a maximum thickness of 4.5 mm.

  Mounting space has been reduced to 30% (compared to conventional SSR's) while meeting high density PC board mounting requirements.
- 2. Snubber circuit preventing malfunction
- 3. Zero-cross type and Random type available
- 4. High dielectric strength of 3,000

(between input and output)

5. Snubber circuit integrated

The snubber circuit is integrated to prevent malfunction caused by the rapid rise of voltage on the output side, such as inductive load and current.

#### TYPICAL APPLICATIONS

- Household appliances such as air conditioners, refrigerators and humidifiers
- Healthcare and medical equipment
- Industrial machinery such as NC machines, mounters, injection molders, and robots
- Microcomputer boards
- Amusement and amenity related equipment

#### ORDERING INFORMATION

	AQG	_
Load current 1: 1 A 2: 2 A		
Load voltage 2: 75 to 264 Vrms		
Type 1: Zero-cross (3,000 V) 2: Random (3,000 V)		
Control voltage 05: 4 to 6 V DC 12: 9.6 to 14.4 V DC 24: 19.2 to 28.8 V DC		

#### **TYPES**

Туре	Load current	Load voltage	Control voltage	Part No.
			4 to 6 V DC	AQG12105
	1 A	75 to 264 Vrms	9.6 to 14.4 V DC	AQG12112
Zero-cross			19.2 to 28.8 V DC	AQG12124
Zero-cross		75 to 264 Vrms	4 to 6 V DC	AQG22105
	2 A		9.6 to 14.4 V DC	AQG22112
			19.2 to 28.8 V DC	AQG22124
Random		75 to 264 Vrms	4 to 6 V DC	AQG12205
	1 A		9.6 to 14.4 V DC	AQG12212
			19.2 to 28.8 V DC	AQG12224
			4 to 6 V DC	AQG22205
	2 A	75 to 264 Vrms	9.6 to 14.4 V DC	AQG22212
			19.2 to 28.8 V DC	AQG22224

-1-

Standard packing: Carton 20 pcs., Case 500 pcs.

#### **RATING**

#### 1. Ratings (Ambient temperature: 20°C 68°F, Input voltage ripple: 1% or less)

#### 1) Zero-cross type

	• •							
Itam	Time		Domostro					
Item	Туре	AQG12105	AQG12112	AQG12124	AQG22105	AQG22112	AQG22124	Remarks
	Rated voltage	5 V DC	12 V DC	24 V DC	5 V DC	12 V DC	24 V DC	
	Control voltage	4 to 6 V DC	9.6 to 14.4 V DC	19.2 to 28.8 V DC	4 to 6 V DC	9.6 to 14.4 V DC	19.2 to 28.8 V DC	
Input	Input impedance	Approx. 0.3 kΩ	Approx. 0.8 kΩ	Approx. 1.6 kΩ	Approx. 0.3 kΩ	Approx. 0.8 kΩ	Approx. 1.6 kΩ	*1
side	Drop-out voltage, min.	1 V						
	Reverse voltage	3 V						
	Max. load current 1 A*2				2 A*2			1 A: Ta = Max. 40°C 104°F 2 A: Ta = Max. 25°C 77°F
	Load voltage							
	Frequency	45 to 65 Hz						
Load side	Non-repetitive surge current	8 A*3			30 A*3			In one cycle at 60 Hz
	Max. "OFF-state" leakage current	1.5 mA						at 60 Hz at 200 Vrms
	Max. "ON-state" voltage drop	1.6 V						at Max. carrying current
	Min. load current	20 mA*4						

#### 2) Random type

Itam	Time	Part No.						Damanta
Item	Туре	AQG12205	AQG12212	AQG12224	AQG22205	AQG22212	AQG22224	Remarks
	Rated voltage	5 V DC	12 V DC	24 V DC	5 V DC	12 V DC	24 V DC	
	Input voltage	4 to 6 V DC	9.6 to 14.4 V DC	19.2 to 28.8 V DC	4 to 6 V DC	9.6 to 14.4 V DC	19.2 to 28.8 V DC	
Input	Input impedance	Approx. 0.3 kΩ	Approx. 0.8 kΩ	Approx. 1.6 kΩ	Approx. 0.3 kΩ	Approx. 0.8 kΩ	Approx. 1.6 kΩ	*1
side	Drop-out voltage, min.	1 V						
	Reverse voltage	3 V						
	Max. load current	1 A*2			2 A*2			1 A: Ta = Max. 40°C 104°F 2 A: Ta = Max. 25°C 77°F
	Load voltage	75 to 264 Vrms						
	Frequency	45 to 65 Hz						
Load side	Non-repetitive surge current	8 A*3			30 A*3			In one cycle at 60 Hz
	Max. "OFF-state" leakage current		at 60 Hz at 200 Vrms					
	Max. "ON-state" voltage drop	1.6 V						at Max. carrying current
	Min. load current 20 mA*4							

- Notes: \*1. Refer to REFERENCE DATA "3. Input current vs. input voltage characteristics".

  \*2. Refer to REFERENCE DATA "1. Load current vs. ambient temperature".

  \*3. Refer to REFERENCE DATA "2. Non-repetitive surge current vs. carrying time".

  \*4. When the load current is less than the rated minimum load current, please refer to "Cautions for Use of Solid State Relays".

#### 2. Characteristics (Ambient temperature: 20°C 68°F, Input voltage ripple: 1% or less)

Item	Zero-cross type	Random type	Remarks
Operate time max.	1/2 cycle of voltage sine wave +1 ms	1 ms	
Release time, max.	1/2 cycle of voltag	e sine wave +1 ms	
Insulation resistance, min.	10 <sup>9</sup> Ω between	input and output	at 500 V DC
Breakdown voltage	3,000 Vrms between	for 1 minute	
Vibration resistance	10 to 55 Hz double a	X, Y, Z axes	
Shock resistance	Min. 1,0	X, Y, Z axes	
Ambient temperature	-30 to +80°C	Non-condensing at low temperatures	
Storage temperature	−30 to +100°C	Non-condensing at low temperatures	
Operational method	Zero-cross (Turn-ON and Turn-OFF)	Random turn ON, zero-cross turn OFF	


-2-

© Panasonic Corporation 2018


ASCTB23E 201806-T

#### REFERENCE DATA


1. Load current vs. ambient temperature



2.-(1) Non-repetitive surge current vs. carrying time (1 A type)\*




2.-(2) Non-repetitive surge current vs. carrying time (2 A type)\*




Note: \*The above chart shows non-repetitive maximum rating. If a surge current is applied repeatedly, please keep it approximately 50% or less than the values shown in the above graph.


3. Input current vs. input voltage characteristics



4.-(1) Load current vs. ambient temperature characteristics for adjacent mounting (1 A type)



4.-(2) Load current vs. ambient temperature characteristics for adjacent mounting (2 A type)



#### **DIMENSIONS** (mm inch)

1. 1 A type


CAD



- . . . . .

The CAD data of the products with a CAD mark can be downloaded from: https://industrial.panasonic.com/ac/e/

#### External dimensions



General tolerance: ±0.2 ±.008

PC board pattern (Bottom view)



Tolerance:  $\pm 0.1 \pm .004$ 

#### Schematic


Input Output - + 0 0 0 0

2. 2 A type

CAD




#### External dimensions



General tolerance: ±0.2 ±.008

© Panasonic Corporation 2018

#### PC board pattern (Bottom view)




Tolerance:  $\pm 0.1 \pm .004$ 

#### Schematic

Input Output - + 0 0 0 0

#### **SCHEMATIC AND WIRING DIAGRAMS**

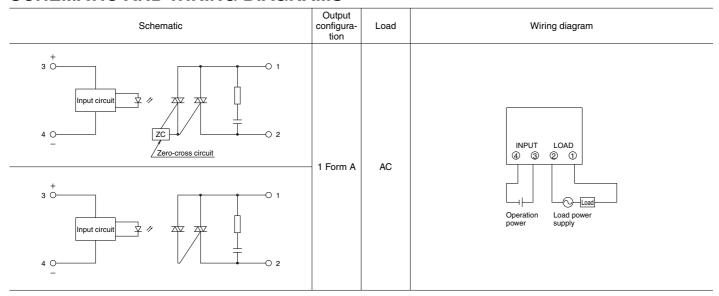

#### **Recommended Temperature Controllers**



#### <KT4H Temperature Controller>

Our temperature controller is recommended for use with our Solid State Relays.

#### Features

- Space saving requiring only a depth of 65 mm
- Data collection possible through a PLC using RS485 communication
- Tool port is standard for easy data setting
- Inverted LCD + backlight for good legibility with large characters
- Excellent operability and rich optional control functions

#### Substitute part numbers

Power supply	Control output	Part No.
100 to 240 Vrms	Non-contact voltage output	AKT4H112100

<sup>\*</sup> For detailed product information about temperature controllers, please refer to our website: https://industrial.panasonic.com/ac/e/

Panasonic Corporation
Electromechanical Control Business Division Please contact ..... ■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan industrial.panasonic.com/ac/e/ **Panasonic** 

ASCTB23E-1 201806-T

©Panasonic Corporation 2018

Specifications are subject to change without notice.

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

AQG22105