CR0301


Programmable controller for mobile machines

R360/CabinetController/Rel.

Article no longer available - archive entry

Alternative articles: CR0303

When selecting an alternative article and accessories please note that technical data may differ!

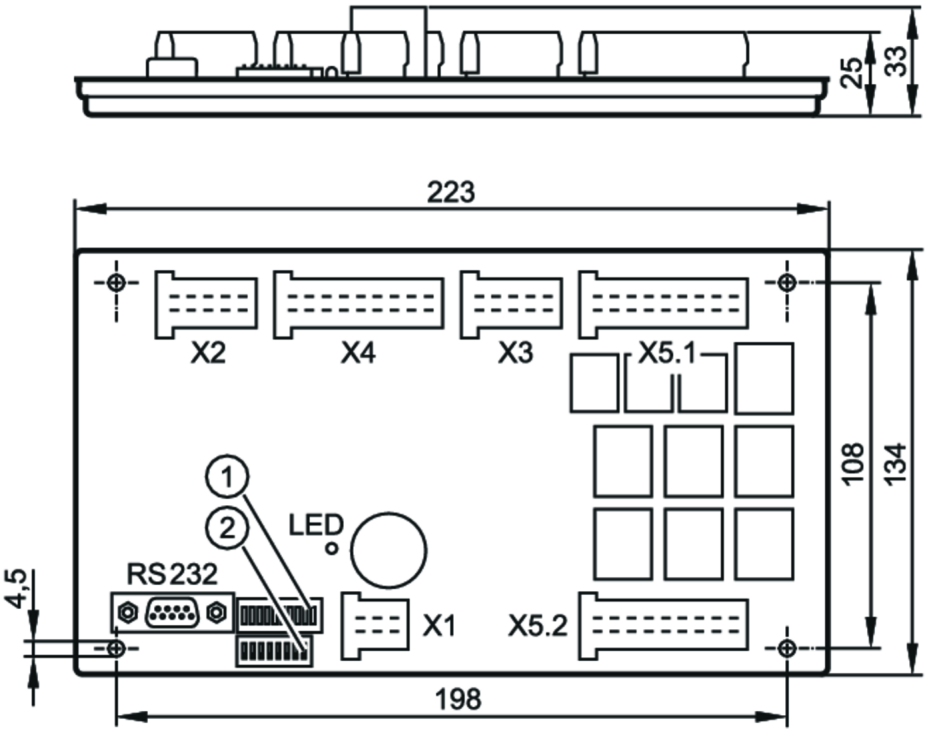

1 LED bar 10-digit
2 DIP switch 8-digit

Electrical data		
Operating voltage	[V]	10...32 DC
Inputs / outputs		
Total number of inputs and outputs		42
Number of inputs and outputs		Number of digital inputs: 24; Number of analogue inputs: 8; Number of frequency inputs: 4; Number of digital outputs: 18; Number of relay outputs: 10
Inputs		
Number of frequency inputs		4
Number of digital inputs		24
Number of analogue inputs		8
Analogue input (current)	[mA]	0...20
Analogue input (voltage)	[V]	0...32
Outputs		
Number of digital outputs		18
Number of relay outputs		10

CR0301

Programmable controller for mobile machines

R360/CabinetController/Rel.

Number of PWM outputs		4
Software / programming		
Parameter setting options		input/output functions
PLC function to IEC 61131-3		yes
Interfaces		
Number of CAN interfaces		1
Number of R232 interfaces		1
Tests / approvals		
MTTF	[years]	84
Mechanical data		
Weight	[g]	616.43
Housing		rectangular
Type of mounting		backplane mounting
Dimensions	[mm]	223 x 134 x 33
Remarks		
Pack quantity		1 pcs.