

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH -- BASIC

CATALOG LISTING

V3-101**CKB 0100****M V3-101**DRAWING
NUMBERISSUE
NO. 17

REVISIONS

A	CO20189	RER	25 MAY 65
B	CO21688	M B F	3 OCT 66
C	CO24941	M B S	3 DEC 68
D	CO26075	M B S	26 AUG 69
E	CO31748	L S D	2 APR 73
F	CO32395	GLH	14 AUG 73
G	CO59921	CO	59921
H	CO74475	K D R	15 APR 93

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

CHECK

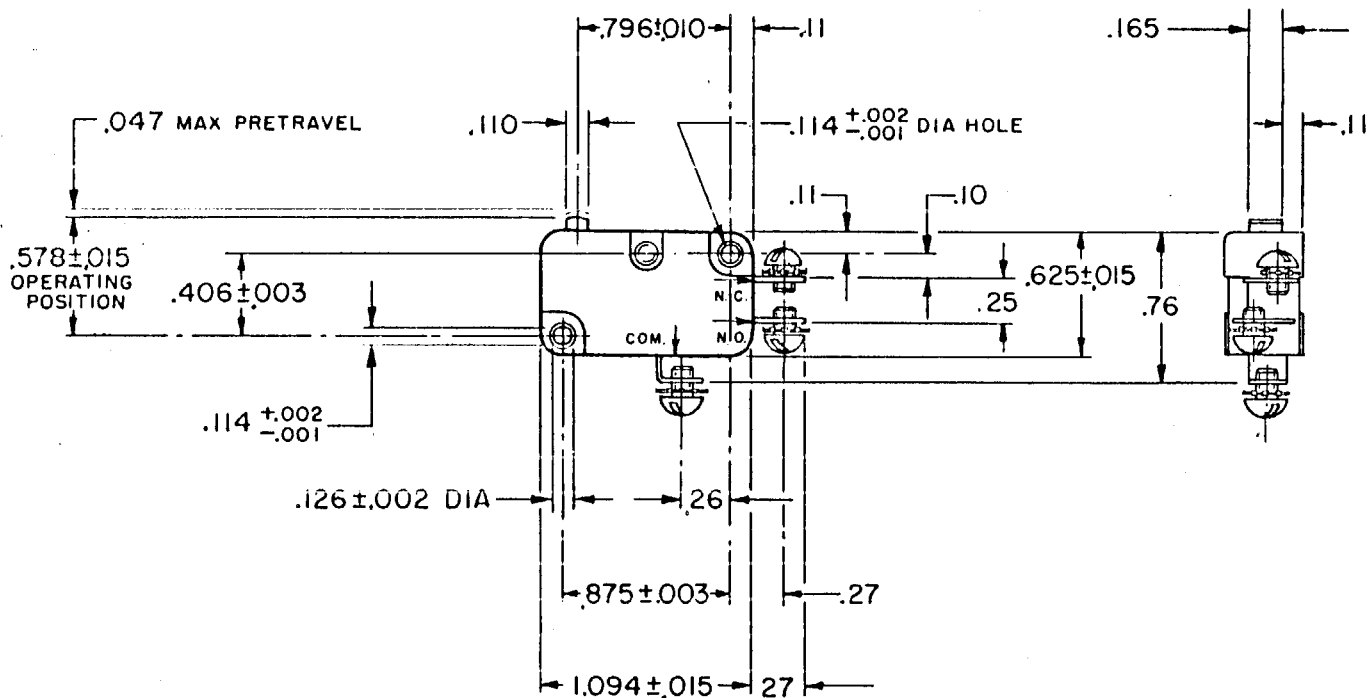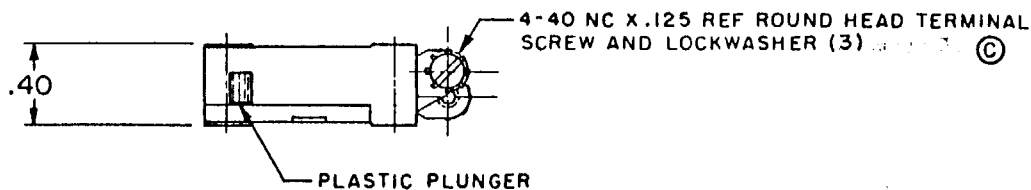

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 8 OZ MAX

RELEASE FORCE ----- 2 OZ MIN

DIFFERENTIAL TRAVEL ----- .006-.016

OVERTRAVEL ----- .040 MIN

FREE POSITION ----- .625 MAX

RELEASE TRAVEL ----- .007 MIN

ELECTRICAL DATA**CONTACT ARRANGEMENT**
S P D T

11A-1/3HP-125-250-277 VAC
- L156 - 1/2A-125 VDC; 1/4A-250 VDC
4A-125 VAC "L"

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .017 L R