




Model Number

V8HAN-G-10M-PVC-ABG

Female cordset, Harting, 8-pin, shielded, PVC cable

Dimensions

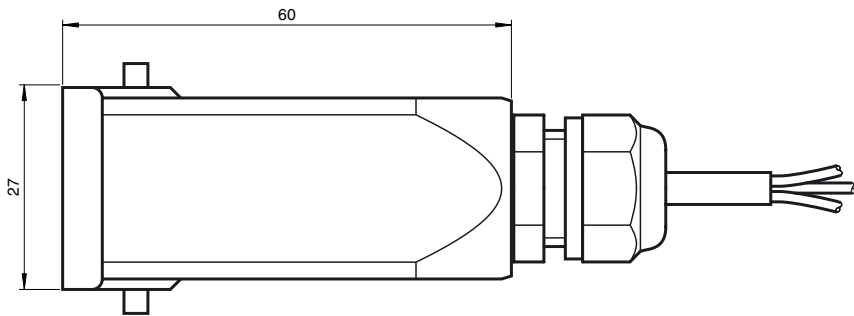

Technical data

General specifications

Number of pins	8
----------------	---

Electrical specifications

Rated operating voltage	U _e	230/400 V
Operating voltage	U _B	50 V
Operating current	I _B	10 A
Volume resistance		< 3 mΩ

Ambient conditions

Ambient temperature	-40 ... 80 °C (-40 ... 176 °F) (fixed cable)
Pollution Degree	3


Mechanical specifications

Pin diameter	1 mm
Degree of protection	IP65
Connection	8 jacks, Harting 8 D , size 3A
Material	
Contacts	Cu alloy
Contact surface	Au
Body	aluminum and polycarbonate
Cable	PVC
Cable	
Sheath diameter	Ø8.7 mm
Bending radius	> 10 x cable diameter, moving
Color	grey
Cores	8 x 0.5 mm ²
Shield	grid
Length	L 10 m
Flammability	
Housing	94 V-0

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529

Electrical connection

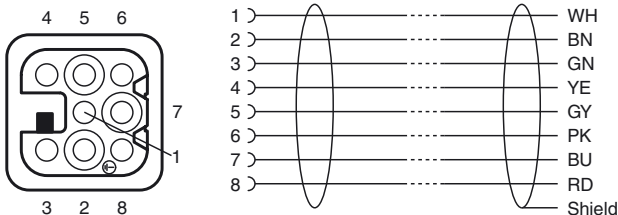

Release date: 2015-06-24 12:01 Date of issue: 2015-06-24 202381_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com