

MICRO SWITCH™
General Purpose Limit Switches
SZL-WL Series



MICRO SWITCH™ SZL-WL Series

General Purpose Limit Switches

MICRO SWITCH™ SZL-WL Series general purpose limit switches are cost effective switches that may be used in a wide range of applications from general purpose conveyors to heavy-duty machinery. Rugged and reliable, the SZL-WL Series switches are specially designed for world-wide use and supported by Honeywell's vast experience in serving industries around the globe.

High quality product offerings combined with Honeywell's global sales and service resources makes the SZL-WL Series the smart choice for industries whose goal is to minimize plant downtime and reduce overall maintenance costs.

What makes our switches better?

- Small size and universal mounting footprint typically allows for use in constricted spaces and reduces replacement costs by providing interchangeability with similar style switches
- Wide variety of actuator heads and an assortment of actuators typically allows the SZL-WL Series to be applied in many types of applications
- IP67 construction often allows for use in dusty and dirty indoor and outdoor applications
- Mechanical service life of up to 10,000,000 operations promotes the durability required for use in many types of industries from factory floor to agriculture and/or machinery



COST OPTIMIZATION • EASE OF USE
RELIABILITY • GLOBAL ACCEPTANCE

Features and Benefits

INDUSTRIAL GLOBAL DESIGN

The SZL-WL Series is designed to the EN50041 mounting standard which promotes interchangeability between other brands of limit switches.

Robust and reliable.

TWO CIRCUIT DOUBLE BREAK CONTACTS

The SZL-WL Series promotes reliable switching under industrial 10 amp current loads and typically allows end users the ability to control two circuits within one switch.

WIDE CHOICE OF ACTUATORS

Honeywell's SZL-WL Series offers side rotary, top and side plunger, and wobble stick style actuators that makes the switch reasonably adaptable to numerous types of applications.

OIL TIGHT, WATER TIGHT, DUST TIGHT

IP67 sealing protects against dust and moisture, and allows the SZL-WL Series to be used in dirty and rugged environments found in both indoor and outdoor applications.

Potential Applications



INDUSTRIAL

- Counting and position sensing on conveyors and assembly lines
- Fixture and tooling position sensing on automated metal removing machines
- Position indication on electric valves on pipelines
- Position indication on dampers, fume hoods, and HVAC/R equipment
- Truck ramp position and elevator car position/leveling control



SZL-WL Series

PRODUCT NOMENCLATURE

Figure 1. SZL-WL for Asia-Pacific Use Only


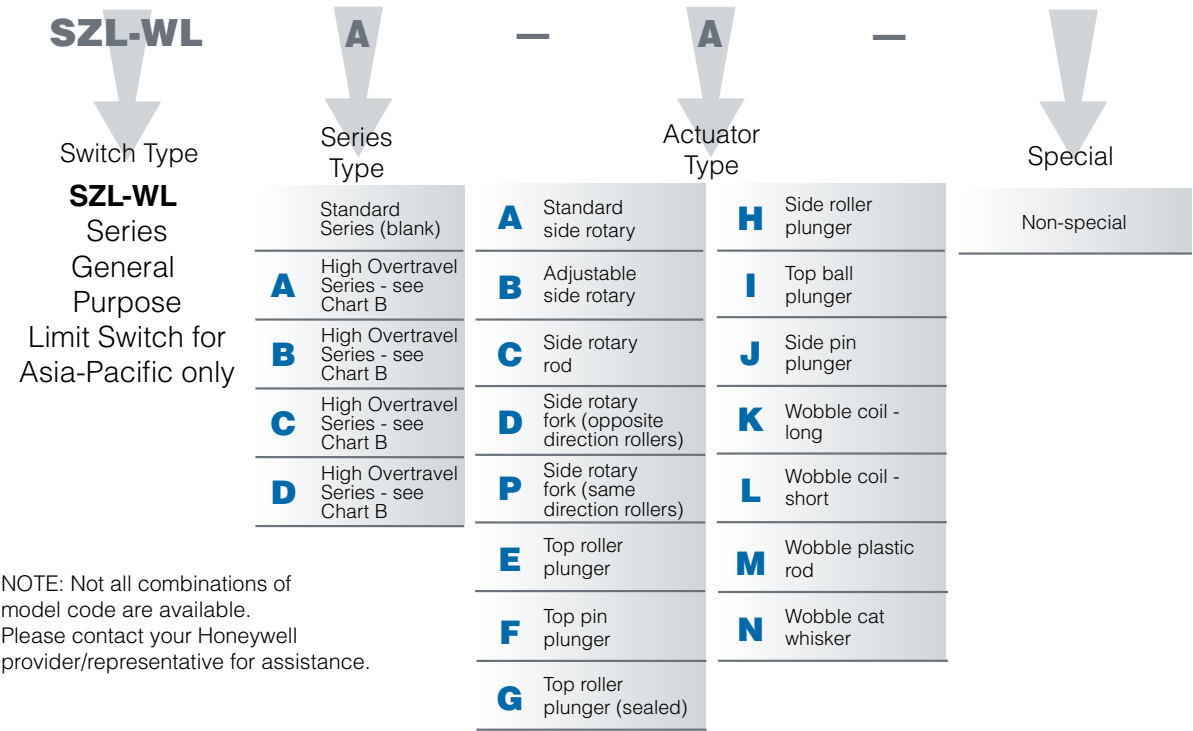


Figure 2. SZL-WL for North American Use Only

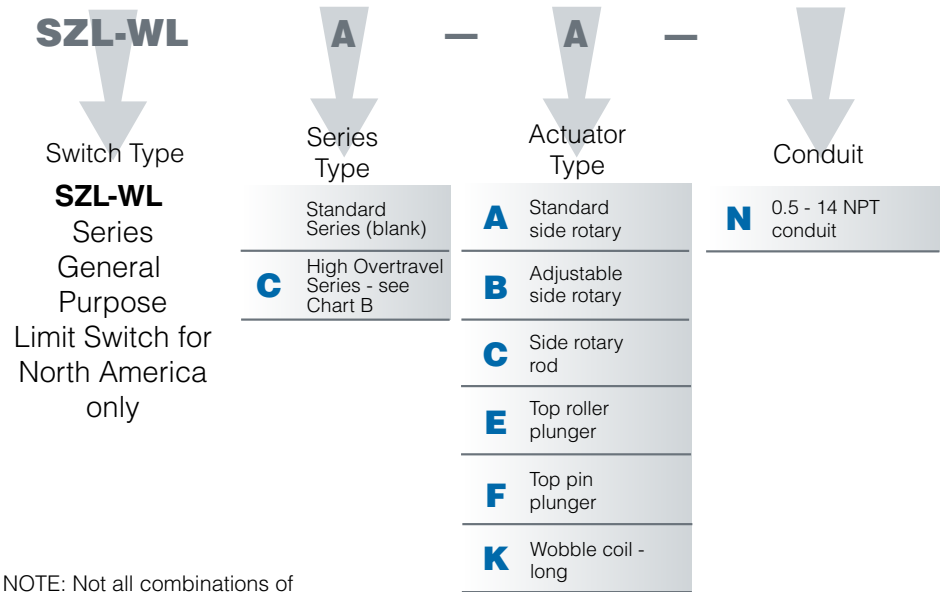

MICRO SWITCH™ General Purpose Limit Switches

Table 1. Chart A • Standard Type

	WL-A	WL-B ¹	WL-C ²	WL-D, P	WL-E	WL-F	WL-G
Pretravel	15° ±5°	15° ±5°	15° ±5°	50° ±5°	1,7 mm [0.07 in] max.	1,7 mm [0.07 in] max.	1,7 mm [0.07 in] max.
Differential Travel	12°	12°	12°	–	1 mm [0.04 in]	1 mm [0.04 in]	1 mm [0.04 in]
Overtravel	30°	30°	30°	35°	5,6 mm [0.22]	6,4 mm [0.25]	5,6 mm [0.22]
Total travel	40°	40°	40°	90°	–	–	–
Operating torque	0,51 Nm [4.5 in-lb]	0,51 Nm [4.5 in-lb]	0,195 Nm [1.72 in-lb]	0,447 Nm [4.0 in-lb]	26,67 N [6 lb] (force)	26,67 N [6 lb] (force)	16,67 N [3.75 lb] (force)

	WL-H	WL-I	WL-J	WL-K ³	WL-L ³	WL-M ³	WL-N ³
Pretravel	2,8 mm [0.11 in]	1,7 mm [0.07 in] max.	2,8 mm [0.11 in] max.	20 mm ±10 mm [0.79 in ±0.039 in]	20 mm ±10 mm [0.79 in ±0.039 in]	40 mm ±20 mm [1.57 in ±0.79 in]	40 mm ±20 mm [1.57 in ±0.79 in]
Differential travel	1 mm [0.04 in]	1 mm [0.04 in]	1 mm [0.04 in]	–	–	–	–
Overtravel	5,6 mm [0.22 in]	6,4 mm [0.25 in]	4,0 mm [0.16 in]	–	–	–	–
Total travel	8,4 mm [0.33 in]	9,2 mm [0.36 in]	5,7 mm [0.22 in]	–	–	–	–
Operating force max.	40,03 N [9 lb]	26,67 N [6 lb]	40,03 N [9 lb]	1,47 N [0.33 lb]	1,47 N [0.33 lb]	1,47 N [0.33 lb]	0,28 N [0.06 lb]

¹ Operating characteristics of the WL-B are measured at the arm length of 38 mm [1.5 in]

² Operating characteristics of the WL-C are measured at the lever length of 140 mm [5.5 in]

³ Operating characteristics of these types are measured at the tip of the actuator

Table 2. Chart B • Overtravel/High Precision Type

	WLA-A	WLB-A	WLA-B ¹	WLB-B ¹	WLA-C ²	WLB-C ²	WLC-A
Pretravel	18° ±4°	10° (-1°/+2°)	18° ±4°	10° (-1°/+2°)	18° ±4°	10° (-1°/+2°)	25° ±5°
Differential travel	10°	7°	10°	–	10°	7°	16°
Overtravel	55°	65°	55°	65°	55°	65°	60°
Total travel	80°	80°	80°	80°	80°	80°	90°
Operating torque max.	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,398 Nm [3.52 in-lb]	0,398 Nm [3.52 in-lb]	0,34 Nm [3.0 in-lb]

	WLC-B ¹	WLC-C ²	WLD-A	WLD-B ¹	WLD-C ²	WLE-A	WLE-B	WLE-C
Pretravel	25° ± 5°	25° ± 5°	20° max.	20° max.	20° max.	6° ±1°	5° (+2°/-0°)	5° (+2°/-0°)
Differential travel	16°	16°	10°	10°	10°	3°	3°	3°
Overtravel	60°	60°	70°	70°	70°	40°	40°	40°
Total travel	90°	90°	90°	90°	90°	40°	40°	40°
Operating torque max.	0,34 Nm [3.0 in-lb]	0,36 Nm [3.16 in-lb]	0,365 Nm [3.23 in-lb]	0,365 Nm [3.23 in-lb]	0,398 Nm [3.52 in-lb]	0,51 Nm [4.5 in-lb]	0,51 Nm [4.5 in-lb]	0,195 Nm [1.72 in-lb]


¹ Operating characteristics are measured at the arm length of 38 mm [1.5 in]

² Operating characteristics are measured at the lever length of 140 mm [5.5 in]

SZL-WL Series

Table 3. Specifications

Characteristic	Parameter
Product type	Honeywell General Purpose Limit Switch
Actuators	side rotary, top roller plunger, top plunger, sealed top roller plunger, side roller plunger, side pin plunger, top ball plunger, wobble/cat whisker, wobble/plastic rod, wobble/coil spring
Circuitry	single pole double throw double break
Electrical	10 A
Housing material	aluminum die-cast
Housing type	industrial
Conduit	PF 1/2, 1/2 in-14 NPT
Sealing	IP67
Operating temperature	-10 °C to 80 °C [14 °F to 176 °F]
Mechanical life	10,000,000 operations
Agency approvals and standards	UL, CE, CSA
Sealed	Industrial

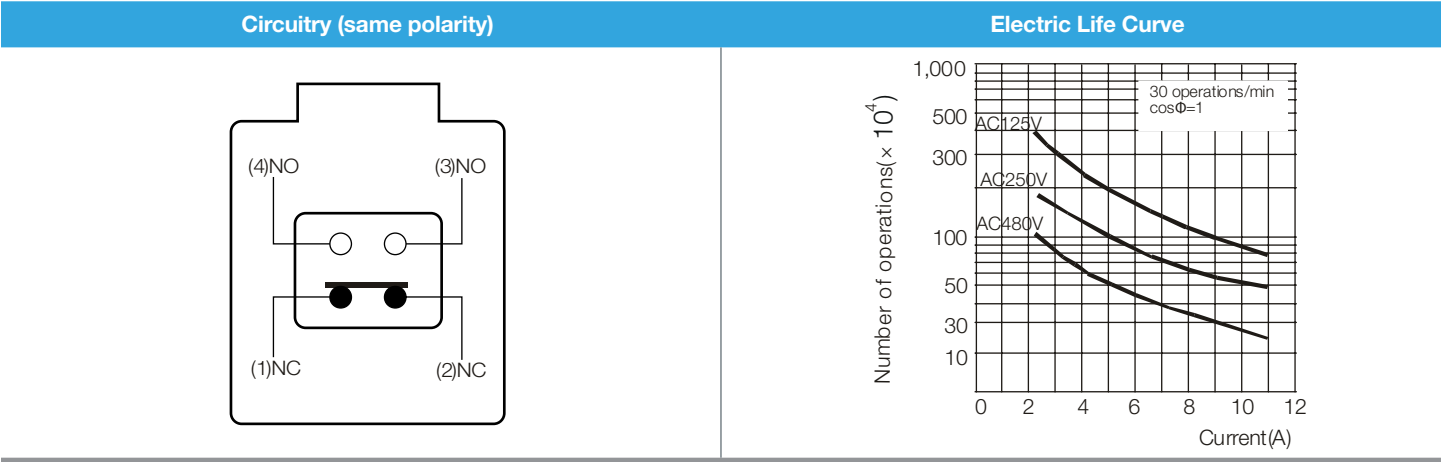










MICRO SWITCH™ General Purpose Limit Switches

ORDER GUIDE/RECOMMENDED LISTINGS

Table 4. Product listings

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-A	side rotary standard lever, standard	—	0,51 [4.5]		20°	30°	12°	PF 1/2
	SZL-WL-A-N								1/2 in NPT
	SZL-WLA-A	side rotary standard lever, high overtravel	—	0,37 [3.3]		22°	55°	10°	PF 1/2
	SZL-WLB-A	side rotary standard lever, high overtravel	—	0,37 [3.3]		12°	65°	7°	PF 1/2
	SZL-WLC-A	side rotary standard lever, high overtravel	—	0,34 [3.0]		30°	60°	16°	PF 1/2
	SZL-WLC-A-N								1/2 in NPT
	SZL-WLD-A	side rotary standard lever, high overtravel	—	0,37 [3.23]		20°	70°	10°	PF 1/2
	SZL-WLE-A	side rotary standard lever, high precision	1	0,51 [4.5]		7°	40°	3°	PF 1/2


Note:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]

SZL-WL Series

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-B	side rotary adjustable lever, standard	1	0,51 [4.5]	0° 20° 50° 1-2 3-4	20°	30°	12°	PF 1/2
	SZL-WL-B-N				0° 8° 50° 3-4 1-2				1/2 in NPT
	SZL-WLA-B	side rotary adjustable lever, high overtravel	1	0,37 [3.3]	0° 22° 77° 1-2 3-4 0° 12° 77° 3-4 1-2	22°	55°	10°	PF 1/2
	SZL-WLB-B	side rotary adjustable lever, high overtravel	1	0,37 [3.3]	0° 12° 77° 1-2 3-4 0° 5° 77° 3-4 1-2	12°	65°	7°	PF 1/2
	SZL-WLC-B	side rotary adjustable lever, high overtravel	1	0,34 [3.0]	0° 30° 90° 1-2 3-4	30°	60°	16°	PF 1/2
	SZL-WLC-B-N				0° 14° 90° 3-4 1-2				1/2 in NPT
	SZL-WLD-B	side rotary adjustable lever, high overtravel	1	0,37 [3.23]	0° 20° 90° 1-2 3-4 0° 10° 90° 3-4 1-2	20°	70°	10°	PF 1/2
	SZL-WLE-B	side rotary adjustable lever, high precision	2	0,51 [4.5]	0° 5° 45° 1-2 3-4 0° 2° 45° 3-4 1-2	5°	40°	3°	PF 1/2




Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]

MICRO SWITCH™ General Purpose Limit Switches

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-C	side rotary rod adjustable, standard	2	0,195 [1.72]	0° 20° 50° 1-2 3-4 →	20°	30°	12°	PF 1/2
	SZL-WL-C-N				0° 8° 50° 3-4 1-2 ←				1/2 in NPT
	SZL-WLA-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 22° 77° 1-2 3-4 → 0° 12° 77° 3-4 1-2 ←	22°	55°	10°	PF 1/2
	SZL-WLB-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 12° 77° 1-2 3-4 → 0° 5° 77° 3-4 1-2 ←	12°	65°	7°	PF 1/2
	SZL-WLC-C	side rotary rod adjustable, high overtravel	2	0,38 [3.16]	0° 30° 70° 1-2 3-4 →	30°	40	16°	PF 1/2
	SZL-WLC-C-N				0° 14° 70° 3-4 1-2 ←				1/2 in NPT
	SZL-WLD-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 20° 90° 1-2 3-4 → 0° 10° 90° 3-4 1-2 ←	20°	70°	10°	PF 1/2
	SZL-WLE-C	Side rotary rod adjustable, high precision	1	0,195 [1.72]	0° 5° 45° 1-2 3-4 → 0° 2° 45° 3-4 1-2 ←	5°	40°	3°	PF 1/2
	SZL-WL-D SZL-WL-P	fork lock lever, opposite direction rollers (-D); same direction rollers (-P) 		0,447 [4.0]	0° 55° 90° 1-2 3-4 → 0° 55° 90° 3-4 1-2 ←	55°	35°	–	PF 1/2















Notes:

- Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
- Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]

SZL-WL Series

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.F. N [lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-E	top roller plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-E-N								1/2 in NPT
	SZL-WL-F	top plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	6,4 mm [0.25 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-F-N								1/2 in NPT
	SZL-WL-G	top roller plunger, sealed	–	16,67 [3.75]		1,7 mm [0.07 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-H	side roller plunger	–	40,03 [9.0]		2,8 mm [0.11 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-I	top ball plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	4 mm [0.157 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-J	side plunger	–	40,03 [9.0]		2,8 mm [0.11 in]	6,4 mm [0.25 in]	1 mm [0.04 in]	PF 1/2

MICRO SWITCH™ General Purpose Limit Switches

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.F. N [lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-K	wobble-coil spring Ø 6,5 mm [Ø 0.256 in]	3, 4	1,47 [0.33]	–	20 mm ±10 mm [0.79 in ±0.39 in]	–	–	PF 1/2
	SZL-WL-K-N								1/2 in NPT
	SZL-WL-L	wobble-coil spring Ø 4,8 mm [Ø 0.189 in]	3, 4	1,47 [0.33]	–	20 mm ±10 mm [0.79 in ±0.39 in]	–	–	PF 1/2
	SZL-WL-M	wobble-plastic rod Ø 8,0 mm [Ø 0.315 in]	3, 4	1,47 [0.33]	–	40 mm ±20 mm [1.57 in ±0.79 in]	–	–	PF 1/2
	SZL-WL-N	wobble-steel wire Ø 1,0 mm [Ø 0.04 in]	3, 4	0,28 [0.06]	–	40 mm ±20 mm [1.57 in ±0.79 in]	–	–	PF 1/2

Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]
3. Operating characteristics are measured at the tip of the actuator
4. Operating force is measured from the tip of the wobble

SZL-WL Series

DIMENSIONS mm [in]

Figure 1. SZL-WL-A

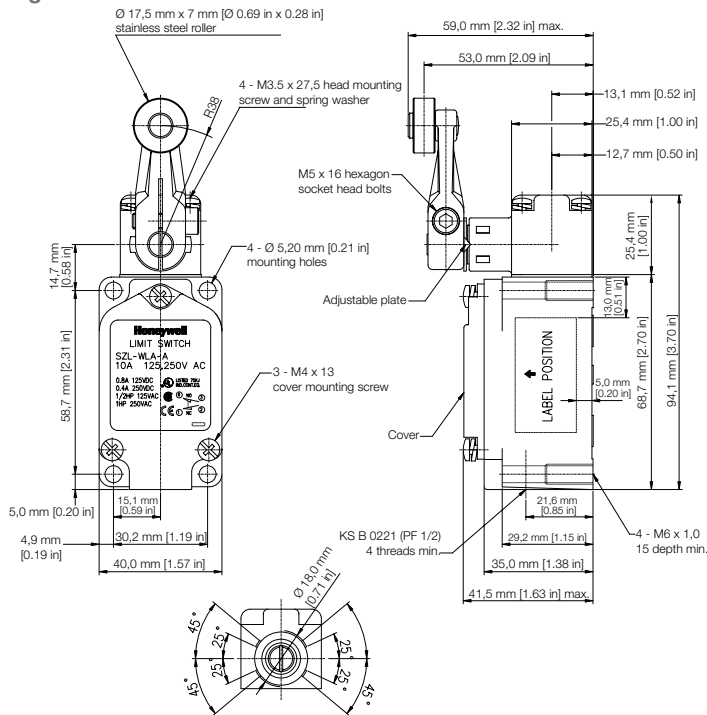


Figure 2. SZL-WL-B

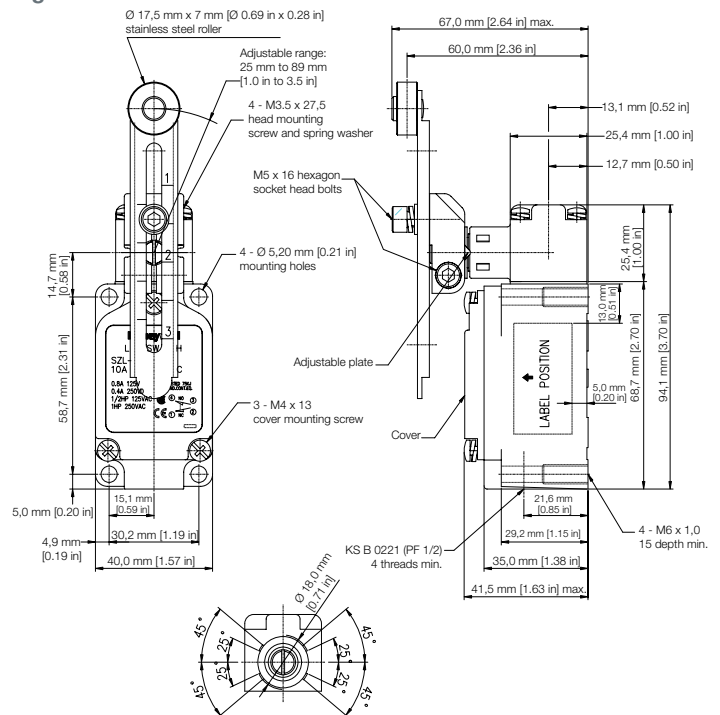


Figure 3. SZL-WL-C


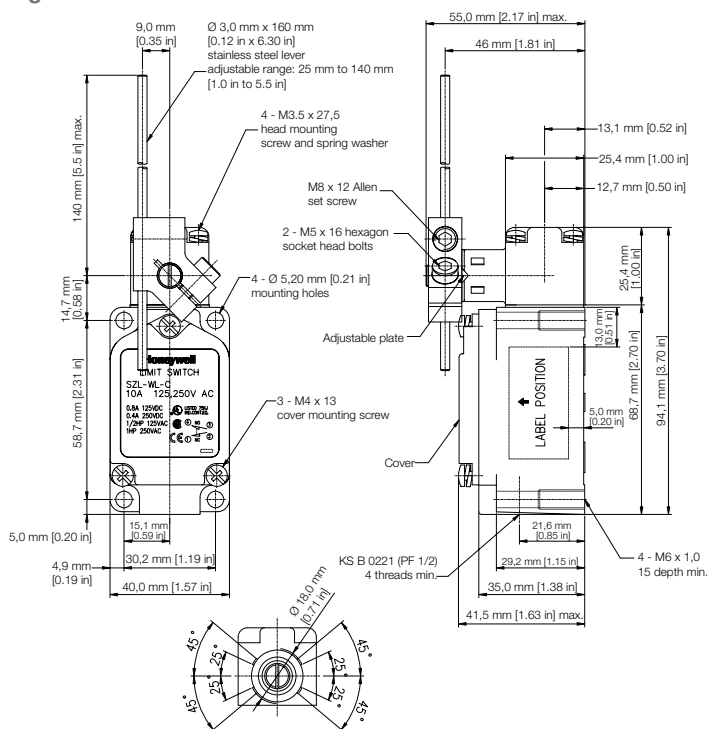


Figure 4. SZL-WL-D and SZL-WL-P

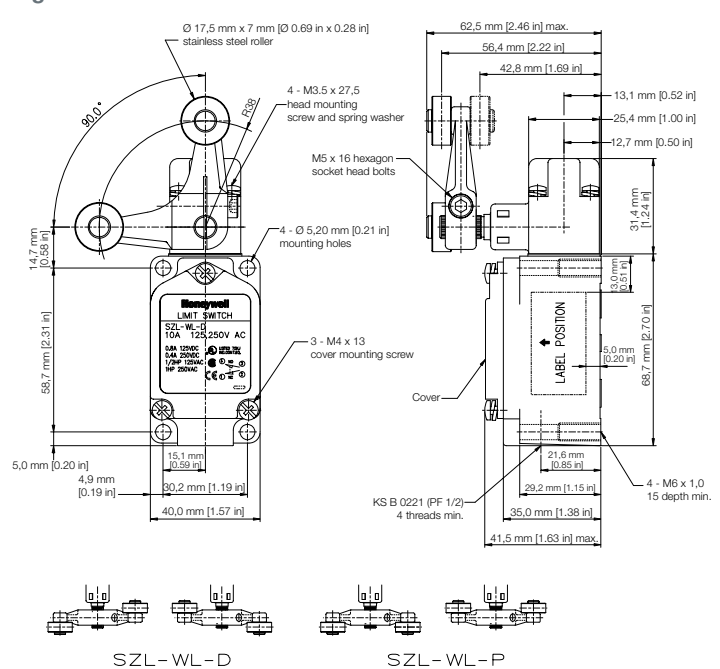

DIMENSIONS mm [in]

Technical drawings of the SZL-WL-E limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Operating position height: 44.0 mm [1.79 in]
- Free position height: 45.4 mm [1.79 in]
- Pretravel: 45.4 mm [1.79 in]
- Roller diameter: Ø 17.5 mm x 5 mm [Ø 0.69 in x 0.20 in]
- Roller material: stainless steel roller
- Mounting holes: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Mounting holes: 4 - Ø 5.20 mm [0.21 in]
- Label dimensions: 58.7 mm [2.31 in] (height), 40.0 mm [1.57 in] (width)
- Label text: Honeywell, LIMIT SWITCH, SZL-WL-E, 10A 125,250V AC, 0.4A 125VDC, 0.4A 250VDC, 1/2HP 125VAC, HP 250VAC, and various safety symbols.
- Cover mounting screws: 3 - M4 x 13 cover mounting screw
- Cover: KS B 0221 (PF 1/2) 4 threads min.
- Bottom dimensions: 5.0 mm [0.20 in] (height), 15.1 mm [0.59 in] (width), 30.2 mm [1.19 in] (width), 4.9 mm [0.19 in] (height), 40.0 mm [1.57 in] (width)

Side View Dimensions:

- Roller diameter: Ø 17.5 mm x 5 mm [Ø 0.69 in x 0.20 in]
- Roller material: stainless steel roller
- Mounting holes: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Mounting holes: 4 - Ø 5.20 mm [0.21 in]
- Label dimensions: 68.7 mm [2.70 in] (height), 40.0 mm [1.57 in] (width)
- Label text: LABEL POSITION
- Cover: KS B 0221 (PF 1/2) 4 threads min.
- Bottom dimensions: 41.5 mm [1.63 in] max. (height), 35.0 mm [1.38 in] (width), 29.2 mm [1.15 in] (width), 21.6 mm [0.85 in] (width), 5.0 mm [0.20 in] (height), 13.0 mm [0.51 in] (height), 28 mm [1.10 in] (height), 12.7 mm [0.50 in] (height), 13.1 mm [0.52 in] (height)

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting holes: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Label: Honeywell LIMIT SWITCH, SZL-VL-F, 10A 125-250V AC, 0.8A 125VAC, 0.4A 250VAC, 1.0A 125VAC, 1.0A 250VAC
- Cover mounting screw: 3 - M4 x 13
- Dimensions: 34.0 mm [1.34 in] free position, 58.7 mm [2.31 in], 5.0 mm [0.20 in], 15.1 mm [0.59 in], 30.2 mm [1.19 in], 4.9 mm [0.19 in], 40.0 mm [1.57 in]

Side View Dimensions:

- Top mounting holes: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Label: LABEL POSITION
- Cover mounting screw: 3 - M4 x 13
- Dimensions: 13.1 mm [0.52 in], 12.7 mm [0.50 in], 19.9 mm [0.78 in], 13.0 mm [0.51 in], 5.0 mm [0.20 in], 66.7 mm [2.70 in], 88.6 mm [3.49 in], 21.6 mm [0.85 in], 29.2 mm [1.15 in], 35.0 mm [1.38 in], 41.5 mm [1.63 in] max.

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top roller assembly height: 44.0 mm [1.79 in] operating position
- Pretravel: 45.4 mm [1.79 in] free position
- Roller diameter: Ø 11.2 mm x 4.9 mm [Ø 0.44 in x 0.19 in] stainless steel roller
- Mounting holes: 4 - M3.5 x 10.0 head mounting screw and spring washer
- Mounting holes: 4 - Ø 5.20 mm [0.21 in] mounting holes
- Label area: 3 - M4 x 13 cover mounting screw
- Label text: Honeywell, LIMIT SWITCH, SZL-WL-D, 10A 125/250V AC, 0.8A 125VDC, 0.4A 250VDC, 1.0HP 125VAC, 1HP 250VAC, and safety symbols.
- Bottom mounting holes: 15.1 mm [0.59 in] (center-to-center), 30.2 mm [1.19 in] (center-to-center)
- Overall width: 40.0 mm [1.57 in]
- Overall height: 58.7 mm [2.31 in]
- Bottom flange thickness: 4.9 mm [0.19 in]
- Bottom flange width: 5.0 mm [0.20 in]

Side View Dimensions:

- Top roller assembly height: 13.1 mm [0.52 in]
- Roller diameter: 12.7 mm [0.50 in]
- Mounting holes: 40.3 mm [1.59 in]
- Label area: 3.0 mm [0.21 in]
- Label text: LABEL POSITION
- Label area: 5.0 mm [0.20 in]
- Overall height: 68.7 mm [2.70 in]
- Bottom flange thickness: 21.6 mm [0.85 in]
- Bottom flange width: 29.2 mm [1.15 in]
- Bottom flange width: 35.0 mm [1.38 in]
- Bottom flange width: 41.5 mm [1.63 in] max
- Bottom flange width: 4 - M6 x 1.0 15 depth min.
- Bottom flange width: KS B 0221 (PF 1/2) 4 threads min.
- Bottom flange width: Cover

[illegible]

DIMENSIONS mm [in]

Technical drawing of the Homag SZL-WL-1 limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting hole diameter: $\varnothing 12,7 \text{ mm}$ [0.50 in] stainless ball
- Head mounting screw and spring washer: 4 - M3.5 x 10,0
- Mounting holes: 4 - $\varnothing 5,20 \text{ mm}$ [0.21 in]
- Cover mounting screw: 3 - M4 x 13
- Label position: KS B 0221 (PF 1/2) 4 threads min.
- Bottom mounting holes: 4 - M6 x 1,0 15 depth min.
- Overall width: 40,0 mm [1.57 in]
- Overall height: 88,6 mm [3.49 in]
- Label height: 19,9 mm [0.78 in]
- Label width: 30,2 mm [1.19 in]
- Label text: Homag, LIMIT SWITCH, SZL-WL-1, 10A 125,250V AC, 0.4A 1250AC, 0.4A 2500AC, 1/2HP 125/250AC, HP 250VAC, CE, IP 65

Side View Dimensions:

- Top mounting hole diameter: $\varnothing 12,7 \text{ mm}$ [0.50 in] stainless ball
- Head mounting screw and spring washer: 4 - M3.5 x 10,0
- Mounting holes: 4 - $\varnothing 5,20 \text{ mm}$ [0.21 in]
- Cover mounting screw: 3 - M4 x 13
- Label position: KS B 0221 (PF 1/2) 4 threads min.
- Bottom mounting holes: 4 - M6 x 1,0 15 depth min.
- Overall width: 40,0 mm [1.57 in]
- Overall height: 88,6 mm [3.49 in]
- Label height: 19,9 mm [0.78 in]
- Label width: 30,2 mm [1.19 in]
- Label text: Homag, LIMIT SWITCH, SZL-WL-1, 10A 125,250V AC, 0.4A 1250AC, 0.4A 2500AC, 1/2HP 125/250AC, HP 250VAC, CE, IP 65

Technical drawing of the SZL-WL-1 limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Top mounting hole diameter: $\varnothing 25$ mm [0.98 in]
- Top mounting hole spacing: 25.4 mm [1.00 in]
- Top mounting hole diameter: 4 - $\varnothing 5,20$ mm [0.21 in] mounting holes
- Top mounting hole diameter: 3 - M4 x 13 cover mounting screw
- Top mounting hole diameter: 5.0 mm [0.20 in]
- Top mounting hole diameter: 4.9 mm [0.19 in]
- Top mounting hole diameter: 15.1 mm [0.59 in]
- Top mounting hole diameter: 30.2 mm [1.19 in]
- Top mounting hole diameter: 40.0 mm [1.57 in]
- Top mounting hole diameter: 58.7 mm [2.31 in]
- Top mounting hole diameter: 17.8 mm [0.70 in]

Side View Dimensions:

- Top mounting hole diameter: 40.6 mm [1.60 in]
- Top mounting hole diameter: 46.6 mm [1.83 in]
- Top mounting hole diameter: 13.1 mm [0.52 in]
- Top mounting hole diameter: 25.4 mm [1.00 in]
- Top mounting hole diameter: 12.7 mm [0.50 in]
- Top mounting hole diameter: 27.5 mm [1.08 in]
- Top mounting hole diameter: 13.0 mm [0.51 in]
- Top mounting hole diameter: 5.0 mm [0.20 in]
- Top mounting hole diameter: 68.7 mm [2.70 in]
- Top mounting hole diameter: 96.2 mm [3.79 in]
- Top mounting hole diameter: 21.6 mm [0.85 in]
- Top mounting hole diameter: 29.2 mm [1.15 in]
- Top mounting hole diameter: 35.0 mm [1.38 in]
- Top mounting hole diameter: 41.5 mm [1.63 in] max.
- Top mounting hole diameter: 4 - M6 x 1,0 15 depth min.
- Top mounting hole diameter: KS B 0221 (PF 1/2) 4 threads min.
- Top mounting hole diameter: Cover
- Top mounting hole diameter: LABEL POSITION
- Top mounting hole diameter: Pretravel 2,8 mm [0.11 in] max.

Technical drawings of the KS B 0221 (PF 1/2) 4 threads min. limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Pretravel: 20,0 mm [0.79 in]
- Overall height: 140 mm [5.51 in]
- Mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Label dimensions: 58,7 mm [2.31 in] (height), 40,0 mm [1.57 in] (width)
- Label text: Heraeus LIMIT SWITCH, SZL-WL-K, 10A 125,250V AC, 0.8A 120VAC, 0.4A 250VAC, 1/2PF 120VAC, 10P 250VAC
- Mounting screws: 3 - M4 x 13 cover mounting screw
- Bottom dimensions: 5,0 mm [0.20 in] (width), 4,9 mm [0.19 in] (width), 15,1 mm [0.59 in] (width), 30,2 mm [1.19 in] (width), 40,0 mm [1.57 in] (width)

Side View Dimensions:

- Cable diameter: Ø 6,5 mm [Ø 0.26 in]
- Cable length: 13,1 mm [0.52 in]
- Label position: 5,0 mm [0.20 in] (width), 68,7 mm [2.70 in] (height)
- Internal dimensions: 13,0 mm [0.51 in] (height), 21,6 mm [0.85 in] (width), 29,2 mm [1.15 in] (width), 35,0 mm [1.38 in] (width), 41,5 mm [1.63 in] max. (width)
- Mounting holes: 4 - M6 x 1.0 15 depth min.
- Cover: KS B 0221 (PF 1/2) 4 threads min.

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top cable travel: 20,0 mm [0.79 in]
- Total height: 128 mm [5.04 in]
- Mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Label dimensions: 58,7 mm [2.31 in] (height), 40,0 mm [1.57 in] (width)
- Label text:
 - Limitwell
 - LIMIT SWITCH
 - SZL-WL-L
 - 10A 125,250V AC
 - 0.8A 1250C
 - 0.4A 2500C
 - 1/2PF 1250A
 - IMP 2000A
- Mounting screws: 3 - M4 x 13 cover mounting screw
- Bottom dimensions: 5,0 mm [0.20 in] (left), 4,9 mm [0.19 in] (bottom left), 15,1 mm [0.59 in] (bottom center), 30,2 mm [1.19 in] (bottom right), 40,0 mm [1.57 in] (width)

Side View Dimensions:

- Top cable travel: 4,8 mm [0.19 in]
- Mounting holes: 13,1 mm [0.52 in]
- Label position: 68,7 mm [2.70 in] (height), 5,0 mm [0.20 in] (width)
- Label text: LABEL POSITION
- Mounting holes: 4 - M6 x 1,0 15 depth min.
- Bottom dimensions: 21,6 mm [0.85 in] (width), 29,2 mm [1.15 in] (width), 35,0 mm [1.38 in] (width), 41,5 mm [1.63 in] max. (width)

MICRO SWITCH™ General Purpose Limit Switches

DIMENSIONS mm [in]

Figure 13. SZL-WL-M


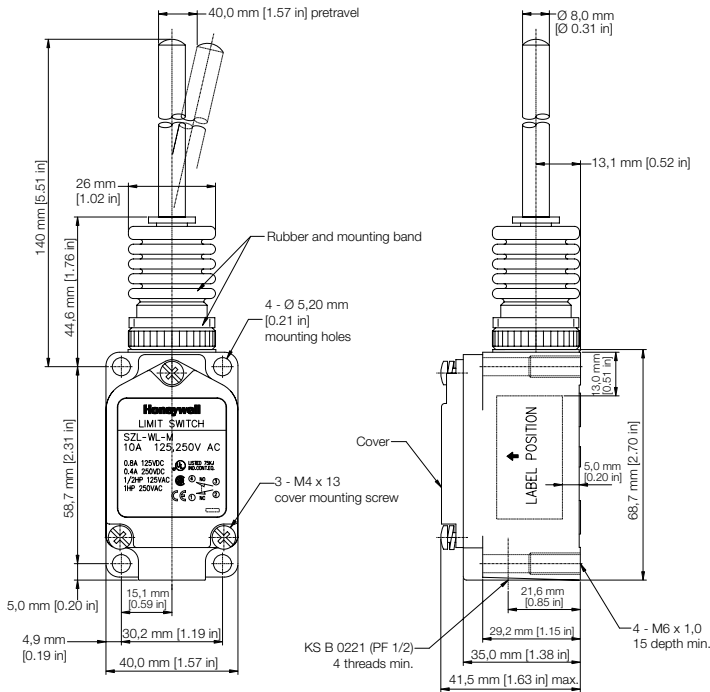


Figure 14. SZL-WL-N

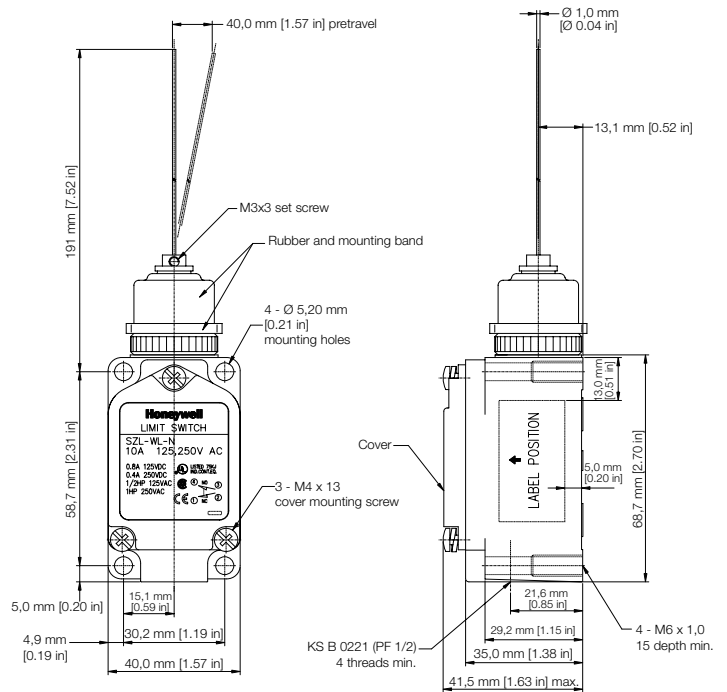

SET POSITION INDICATOR

Proper Operation Zone

- The two convex indicators on the shaft housing show the operating zones for proper operation, thereby, simplifying installation and maintenance.
- Too much over-travel may cause shortened mechanical life due to possible damage to the switch mechanism.

Figure 15. Side Rotary Proper Operation Zone


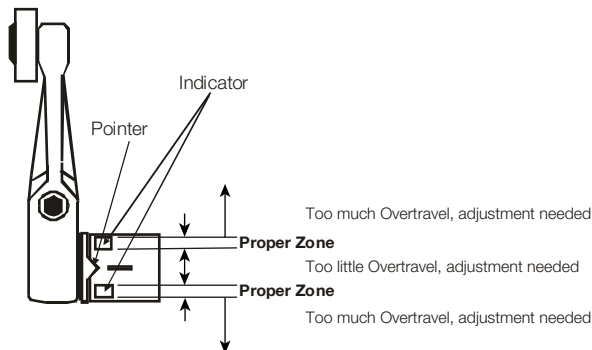


Figure 18. Rear Mount



Standard/High Precision Series

- ### Figure 19. Standard/High Precision Type Switches

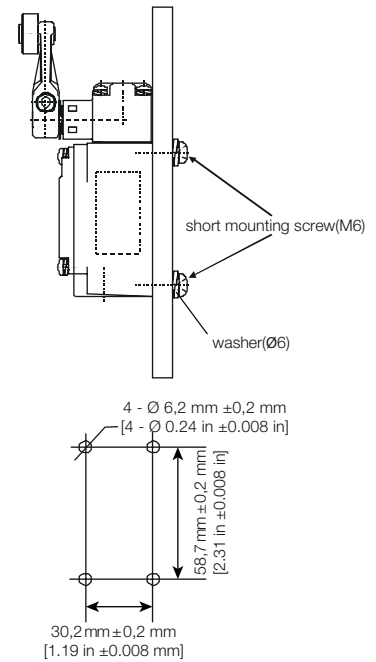


MICRO SWITCH™ General Purpose Limit Switches

OVERTRAVEL “D” SERIES

- The Overtravel “D” Series switches can be set to one side actuation mode by rotating the cam located inside the operating head as shown below.

Figure 20. Overtravel “D” Series

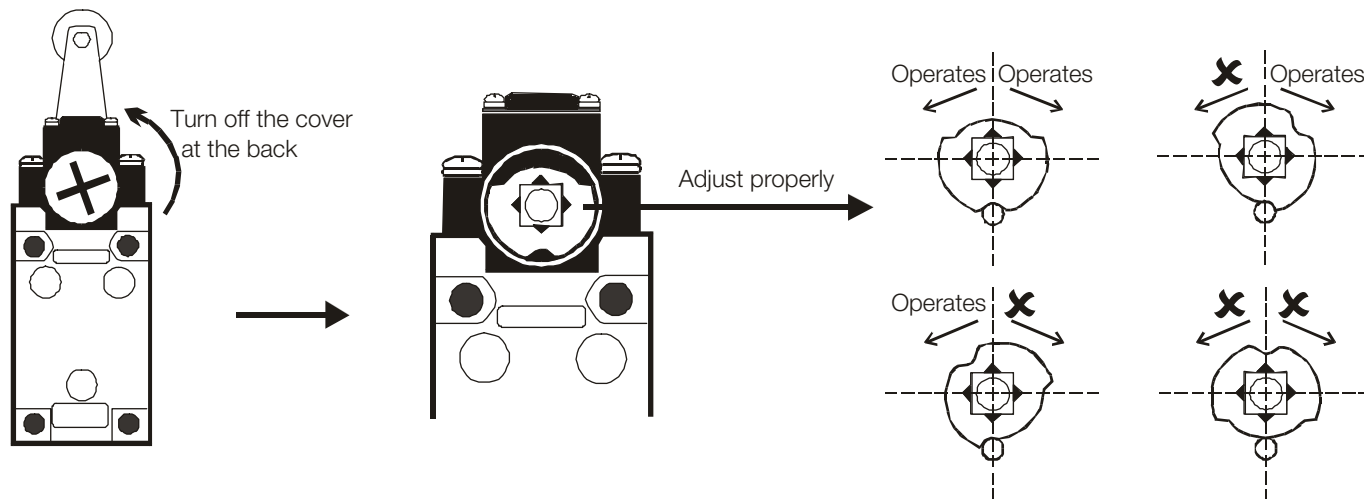


OPERATING HEAD DIRECTION CHANGE

90° Incremental Rotation

- Most SZL-WL –D, P, E, G, H, and J Series switches allow for the operating head to be rotated to any of the four positions indicated below. Loosen the four head lock screws and rotate the head to the desired position.

Note* The head of the Overtravel “D” Series can be set **ONLY** to directions **1** and **3**.

Figure 21. SZL-WL Head Rotation

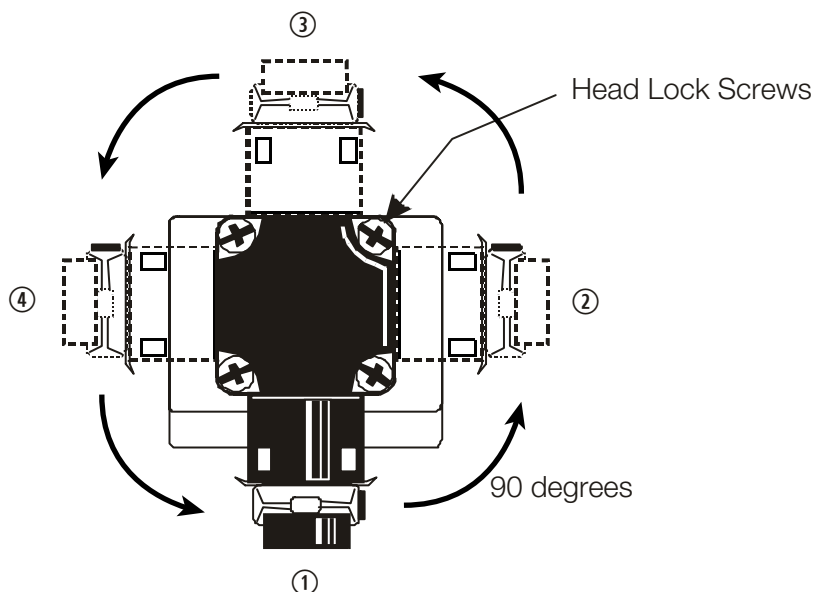

SZL-WL Series

CABLES

Product Nomenclature

ZLC	—	4	D	S	D	—	3	
Cable		Number of Strands	Voltage	Shape	Type		Actuator Type	
ZLC Series		2 Two (2) strands	A ac	S Straight	F Female		03 0,3 m [11.80 in]	Terminal number and wire color Terminal 1: Brown Terminal 2: White Terminal 3: Blue Terminal 4: Black
Cable for use with SZL-WL Series Limit Switches		3 Three (3) strands	D dc	L Elbow shape	M Male		2 2 m [6.56 ft]	
		4 Four (4) strands					3 3 m [9.84 ft]	
							5 5 m [16.40 ft]	
							7 7 m [22.96 ft]	

Figure 22. ZLC-4DLF-__



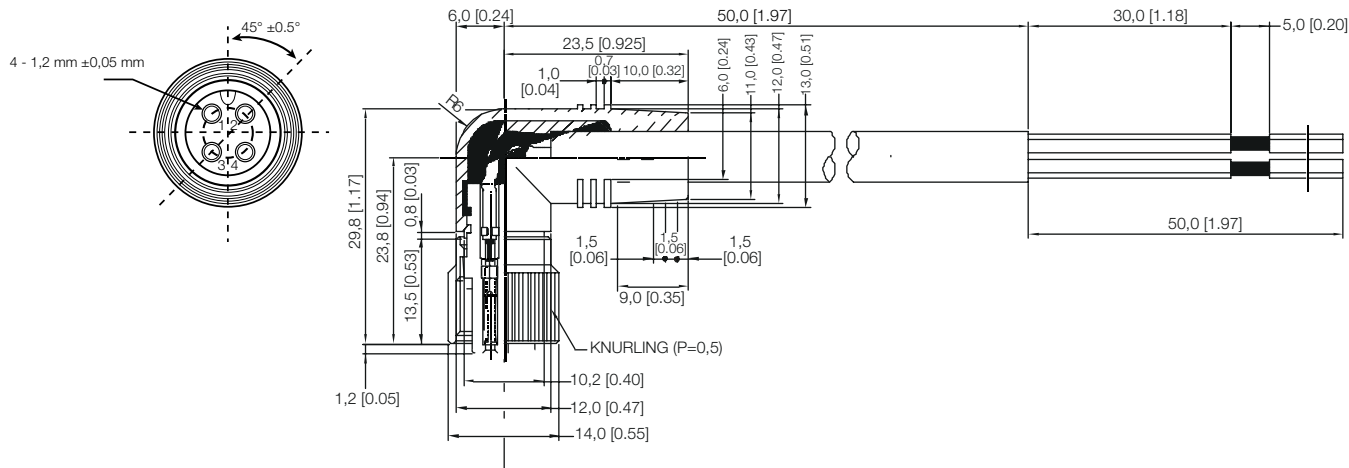


Figure 23. ZLC-4DSF-__

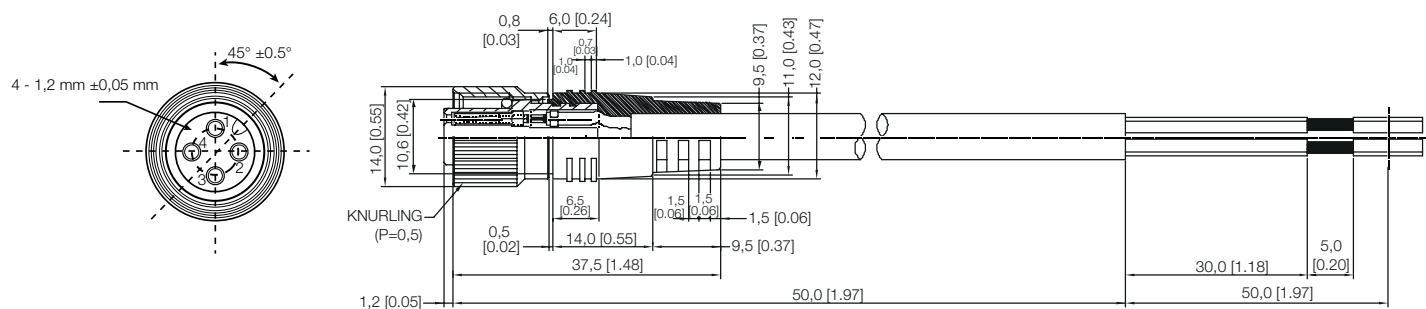

MICRO SWITCH™ General Purpose Limit Switches

Figure 24. ZLC-4DSM-__

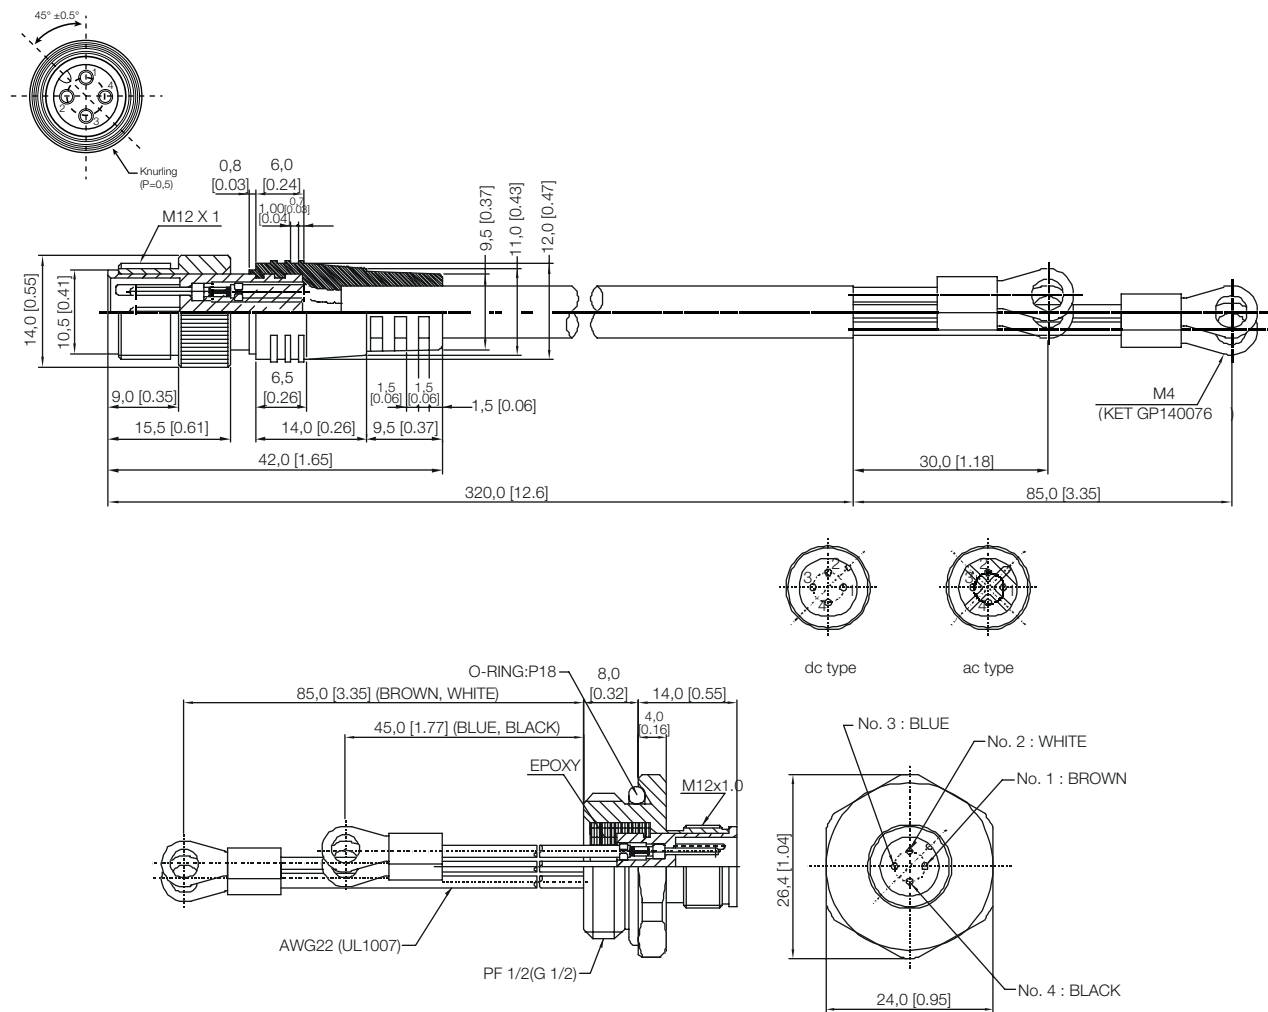

NOTE: Receptacle required for using cables. Order part number ZLC-4DRM-85.

SZL-WL Series

SEAL CONNECTOR

Product Nomenclature


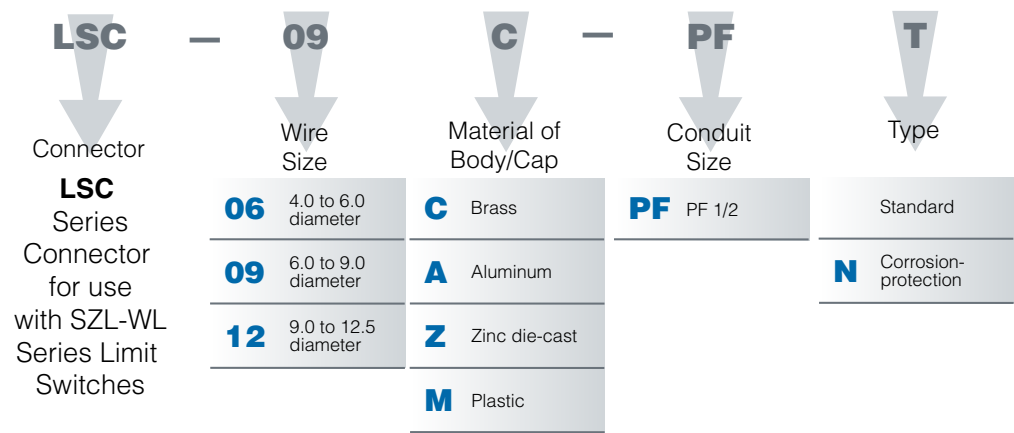


Figure 25. LSC-09C-PFT

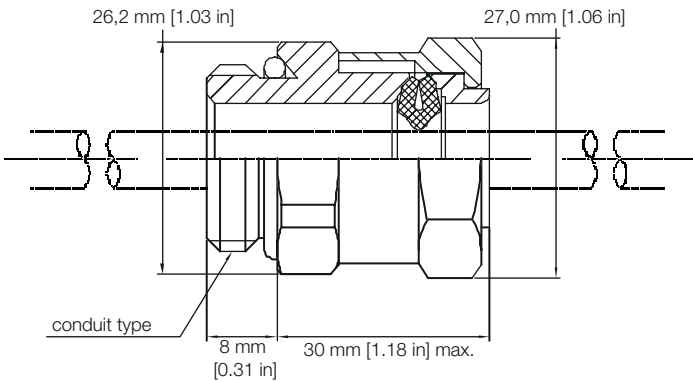

MICRO SWITCH™ General Purpose Limit Switches

ADDITIONAL INFORMATION

The following associated literature is available on the Web at sensing.honeywell.com:

- Product installation instructions
- Product range guide
- Product nomenclature tree
- Product application-specific information
 - Application Note: Application in Injection Molding Machine (IJM)

This Honeywell datasheet supports the following MICRO SWITCH™ SZL-WL Series listings:

SZL-WL-A	SZL-WLD-B	SZL-WL-G
SZL-WL-A-N	SZL-WLE-B	SZL-WL-H
SZL-WL-B-N	SZL-WL-C	SZL-WL-I
SZL-WL-C-N	SZL-WLA-C	SZL-WL-J
SZL-WL-E-N	SZL-WLB-C	SZL-WL-K
SZL-WL-F-N	SZL-WLC-A-N	SZL-WL-L
SZL-WLA-A	SZL-WLC-B-N	SZL-WL-M
SZL-WLB-A	SZL-WLC-C	SZL-WL-N
SZL-WLC-A	SZL-WLC-C-N	SZL-WL-P
SZL-WLD-A	SZL-WLD-C	SZL-WL-A-LEVER
SZL-WLE-A	SZL-WLE-C	SZL-WL-A-LEVER-P
SZL-WL-B	SZL-WL-D	SZL-WL-B-LEVER
SZL-WLA-B	SZL-WL-E	SZL-WL-B-LEVER-P
SZL-WLB-B	SZL-WL-F	SZL-WL-C-LEVER
SZL-WLC-B		

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.